







Customer name:

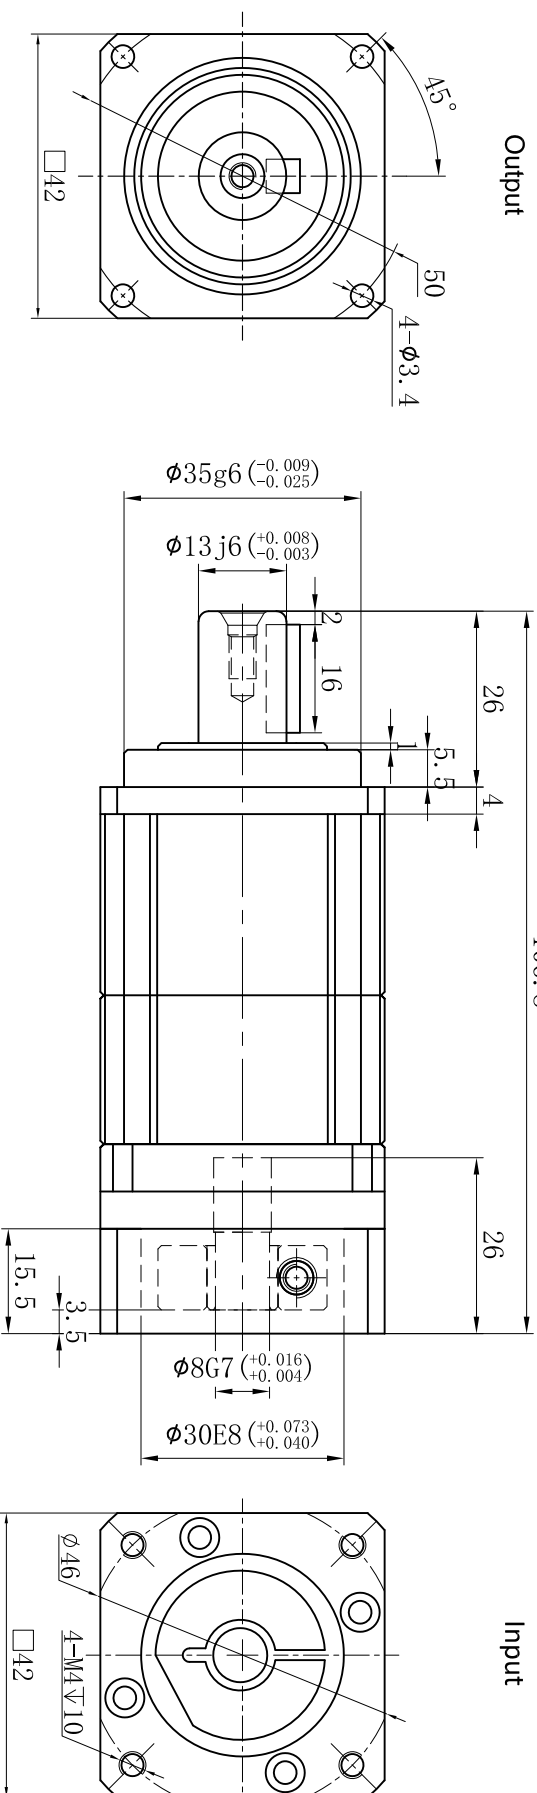

Transmission ratio	( <u>  A  </u> ):1	Mass moments of inertia	( <u>  B  </u> )Kg.cm <sup>2</sup>	<div><div></div><div></div></div>												
Rated output torque	( <u>  C  </u> )Nm	Max.Output torque	( <u>  D  </u> )Nm		40	0.03	17	30.6	Sign/Date		100	0.03	14	25.2		
Rated input speed	5000rpm	Max input speed	10000rpm		35	0.03	19	34.2			70	0.03	19	34.2		
Max.radial force	780N	Max.axial force	390N		25	0.03	20	36								
					20	0.03	19	34.2			50	0.03	20	36		
Efficiency	≥ 94%	Operating temperature	-20°~+90°	Ratio	A	B	C	D		Ratio	A	B	C	D		
Mounting position	Any	Lubrication method	Synthetic grease	NOTE						Precision Planetary Reducer	TB042					
Weight ±3%	0.7Kg	Service life	20000h													
Standard backlash	≤ 5 arcmin	Protection class	IP65		Mark		No.		Sign		Date		TB042-L2			
Motor power		Noise level	55dB									Shaft Type	Precision			
Motor dimensions																

Above specifications are for standard reducer and may be subject to change without notice.