


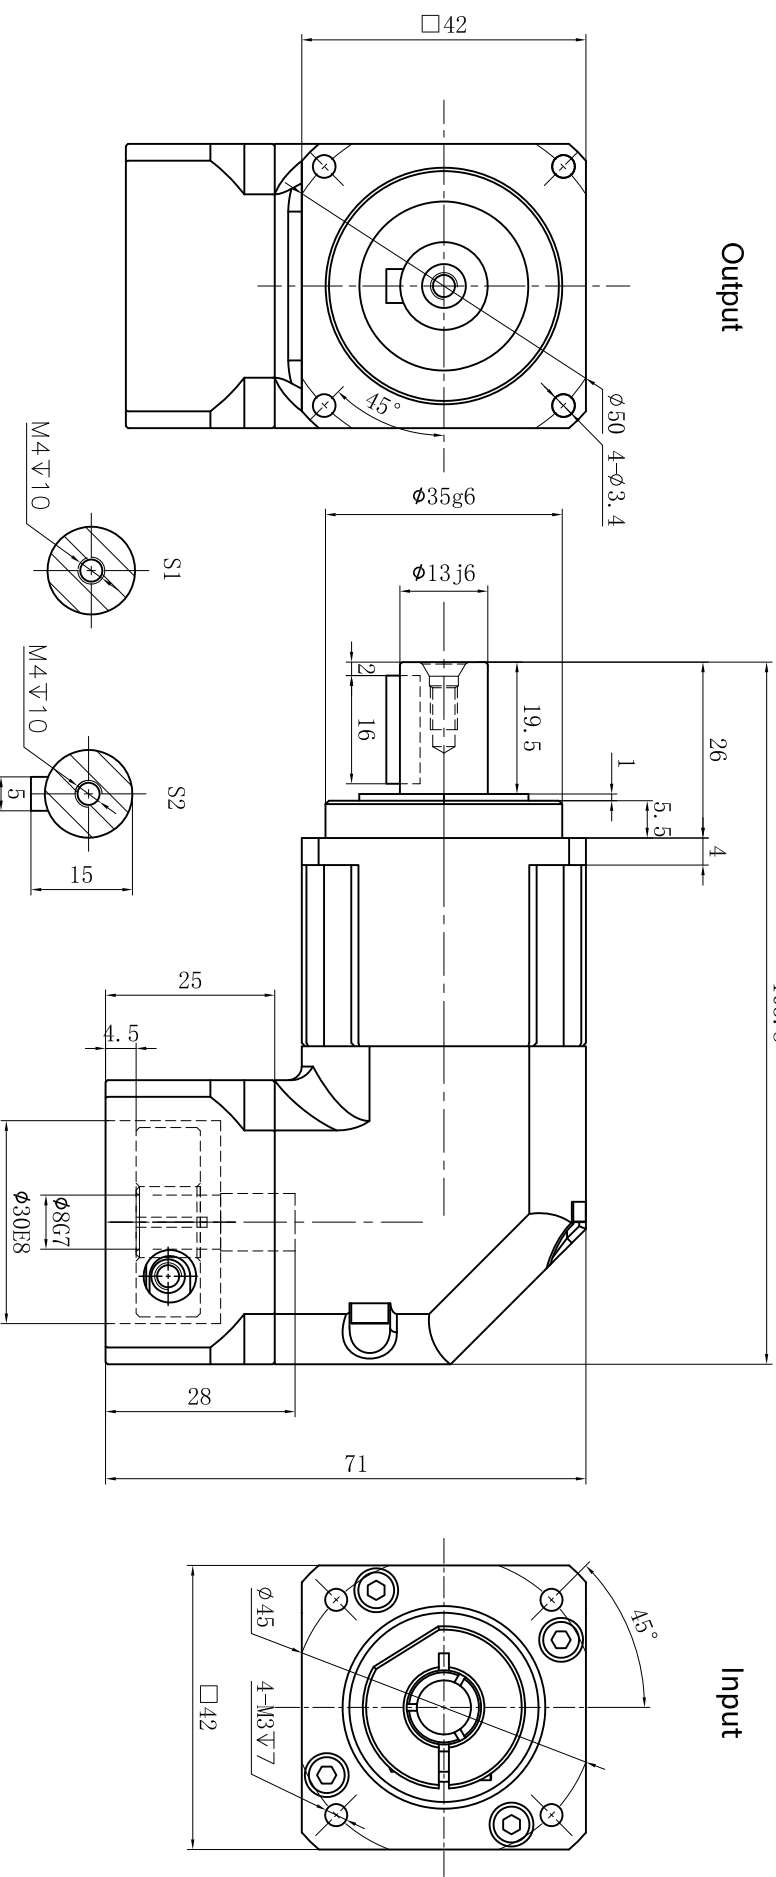


Customer name:

Output

103.8

Input



Transmission ratio	( <u> A </u> ):1	Mass moments of inertia	( <u> B </u> )Kg.cm <sup>2</sup>												
Rated output torque	( <u> C </u> )Nm	Max.Output torque	( <u> D </u> )Nm												
Rated input speed	5000rpm	Max input speed	10000rpm		10	0.09	14	25	Sign/Date						
					7	0.09	19	34							
					5	0.09	18	32							
					4	0.09	15	27							
Max.radial force	780N	Max.axial force	390N	Ratio	A	B	C	D			Ratio	A	B	C	D
Efficiency	≥ 95%	Operating temperature	-20°~+90°												
Mounting position	Any	Lubrication method	Synthetic grease	NOTE											
Weight ±3%	0.7Kg	Service life	20000h												
Standard backlash	≤ 6 arcmin	Protection class	IP65	Mark	No.	Sign	Date	Precision Planetary Reducer				TBR042			
												TBR042-L1			
Motor power		Noise level	61dB									Shaft Type		Precision	
Motor dimensions				<div><div></div><div></div></div> <div></div> <div></div> <div></div>											