





Customer name:

Output

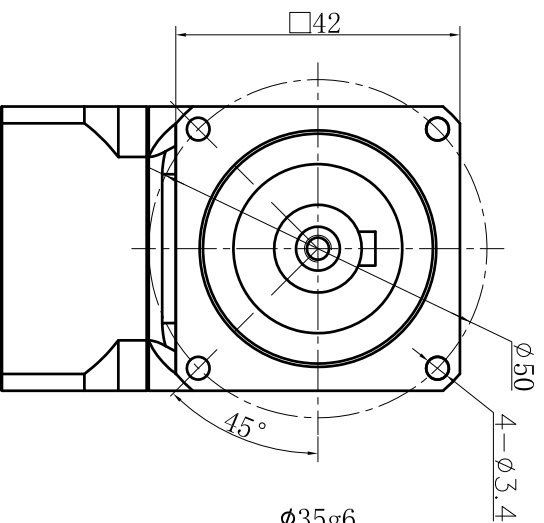

103.8


Input

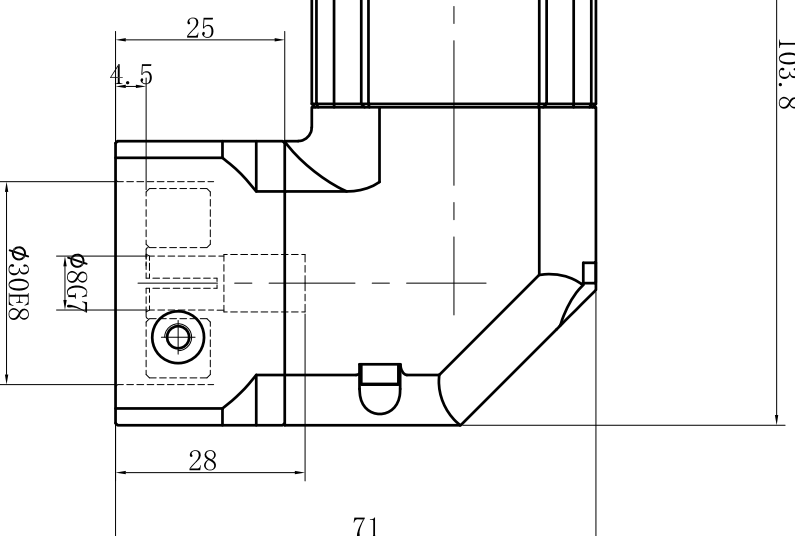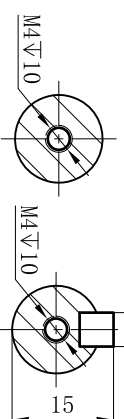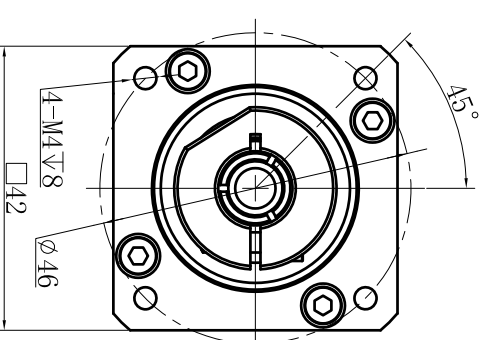


Transmission ratio	(<u>A</u>):1	Mass moments of inertia	(<u>B</u>)Kg.cm²
Rated output torque	(<u>C</u>)Nm	Max.Output torque	(<u>D</u>)Nm
Rated input speed	5000rpm	Max input speed	10000rpm
Max.radial force	780N	Max.axial force	390N
Efficiency	≥ 95%	Operating temperature	-20°~+90°
Mounting position	Any	Lubrication method	Synthetic grease
Weight ±3%	0.7Kg	Service life	20000h
Standard backlash	≤ 6 arcmin	Protection class	IP65
Motor power		Noise level	61dB
Motor dimensions			

	Ratio	A	B	C	D	Sign/Date						
	10	0.09	14	25.2								
	7	0.09	19	34.2								
	5	0.09	18	32.4								
	4	0.09	15	27								
Ratio	A	B	C	D								

NOTE				Precision Planetary Reducer	TBR042
Mark	No.	Sign	Date		





TBR042-L1	
Shaft Type	Precision