
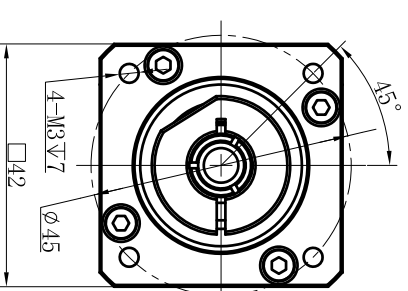
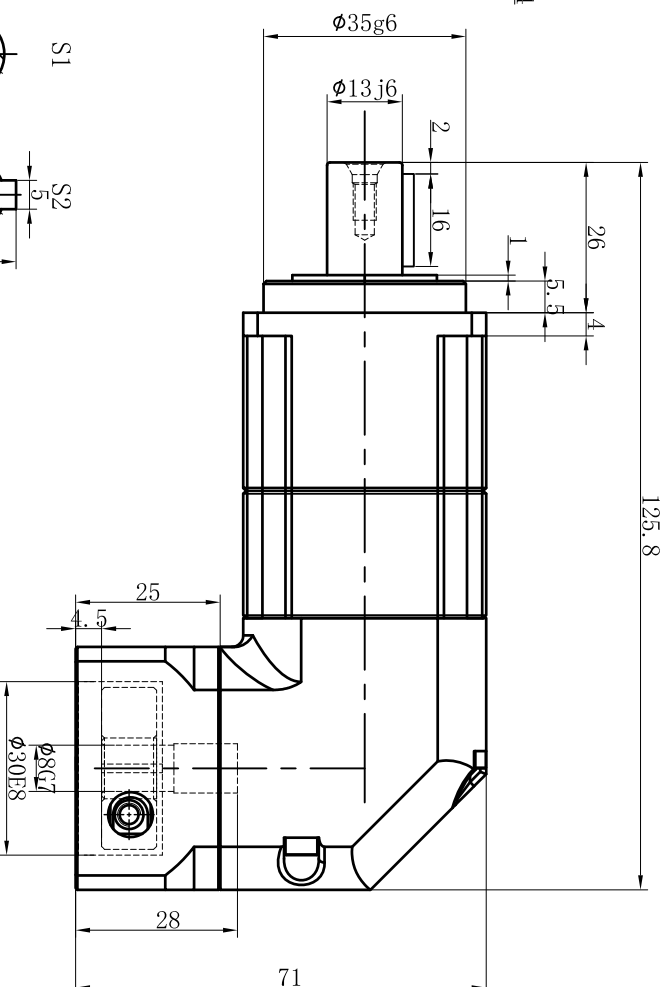
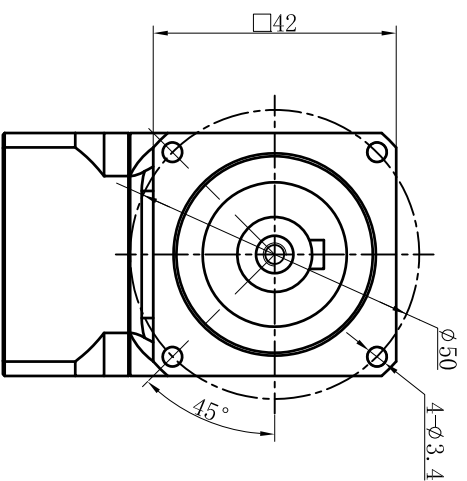





Customer name:

## Output



Transmission ratio	( <u>  A  </u> ):1	Mass moments of inertia	( <u>  B  </u> )Kg.cm <sup>2</sup>		50	0.09	18	32	Sign/Date			100	0.09	14	25.2
Rated output torque	( <u>  C  </u> )Nm	Max.Output torque	( <u>  D  </u> )Nm		35	0.09	19	34.2				70	0.09	19	34.2
Rated input speed	5000rpm	Max input speed	10000rpm												
Max.radial force	780N	Max.axial force	390N		25	0.09	18	32							
					20	0.09	15	27							
Efficiency	≥ 92%	Operating temperature	-20°~+90°	Ratio	A	B	C	D			Ratio	A	B	C	D
Mounting position	Any	Lubrication method	Synthetic grease	NOTE								Precision Planetary Reducer		TBR042	
Weight ±3%	1.1Kg	Service life	20000h												
Standard backlash	≤ 9 arcmin	Protection class	IP65	Mark	No.	Sign	Date				TBR042-L2				
Motor power		Noise level	61dB											Shaft Type	Precision
Motor dimensions															