



Customer name:

Output

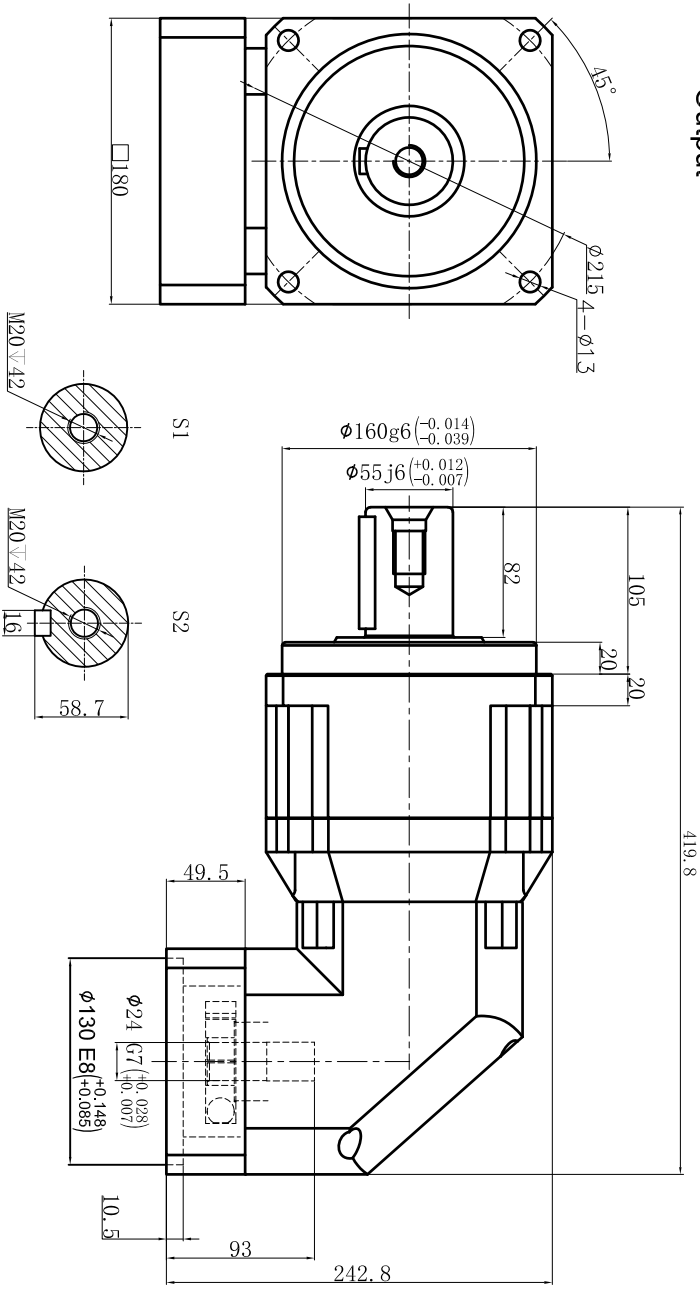

Input

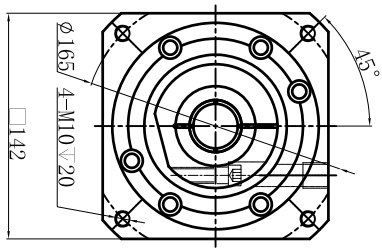

Transmission ratio	(<u> A </u>):1	Mass moments of inertia	(<u> B </u>)Kg.cm ²												
Rated output torque	(<u> C </u>)Nm	Max.output torque	(<u> D </u>)Nm		40	7.42	1000	1800	Sign/Date						
Rated input speed	3000rpm	Max input speed	6000rpm		35	7.42	1100	1980			100	2.57	900	1620	
					30	7.42	1100	1980			80	2.57	1000	1800	
					25	7.42	1200	2160			70	2.57	1100	1980	
					20	7.42	1050	1890			60	2.57	1100	1980	
Max.radial force	14500N	Max.axial force	7250N		15	7.42	588	1058			50	2.57	1200	2160	
				Ratio	A	B	C	D	Ratio		A	B	C	D	
Efficiency	≥ 92%	Operating temperature	-20°~+90°	Note							Precision planetary reducer				
Mounting position	Any	Lubrication method	Synthetic grease									TBR180			
Weight ±3%	56Kg	Service life	20000h												
Standard backlash	≤ 9 arcmin	Protection class	IP65												
Motor power		Noise level	72dB									Shaft Type		Precision	
Motor dimensions															

<