
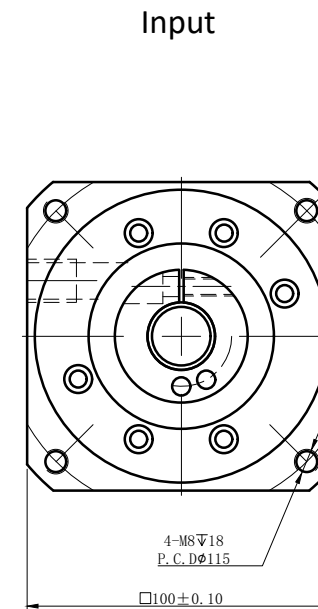
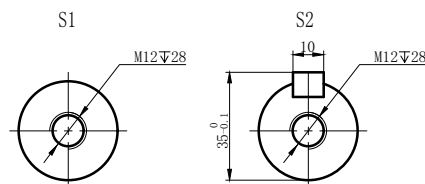
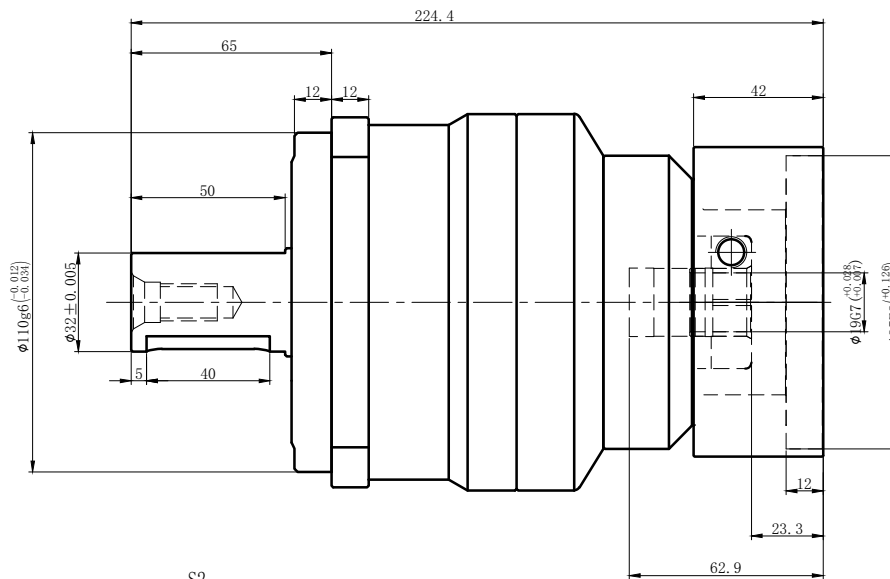



Customer name:

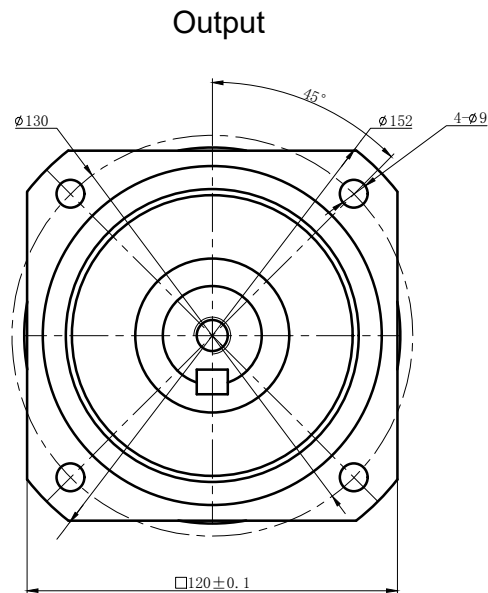

Transmission ratio	(<u> A </u>):1	Mass moments of inertia	(<u> B </u>)Kg.cm ²		40	0.47	255	459	Sign/Date					
Rated output torque	(<u> C </u>)Nm	Max.Output torque	(<u> D </u>)Nm		35	0.47	300	540			100	0.44	220	396
Rated input speed	3000rpm	Max input speed	6000rpm		30	0.47	310	558			80	0.44	255	459
Max.radial force	6700N	Max.axial force	3350N		25	0.47	320	576			70	0.44	300	540
					20	0.47	280	504			60	0.44	310	558
Efficiency	≥ 94%	Operating temperature	-20°~+90°	Ratio	15	0.47	200	360			50	0.44	320	576
					A	B	C	D		Ratio	A	B	C	D
Mounting position	Any	Lubrication method	Synthetic grease	NOTE					Precision Planetary Reducer	TCB120				
Weight ±3%	9Kg	Service life	20000h											
Standard backlash	≤ 7 arcmin	Protection class	IP65		Mark	No.	Sign	Date		TCB120-L2				
Motor power		Noise level	63dB											
Motor dimensions											Shaft Type	Precision		