

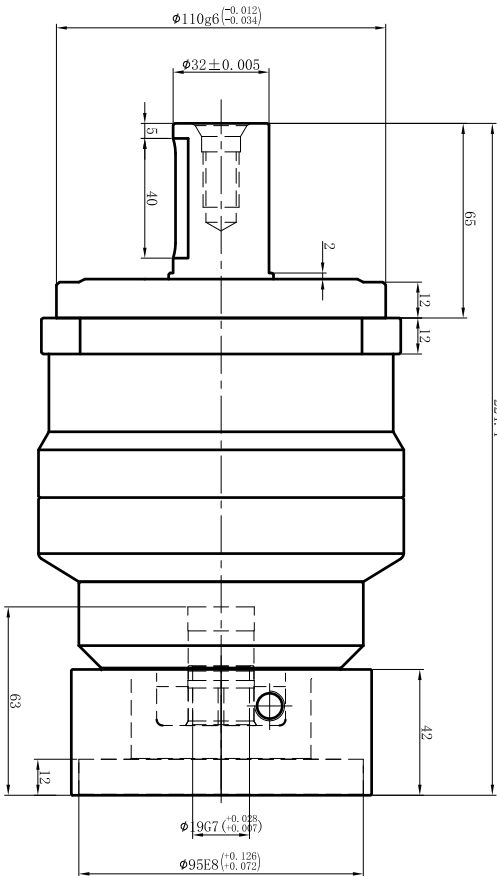
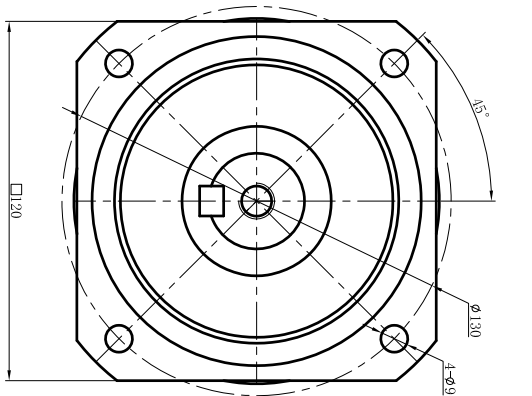


Customer name:

Output

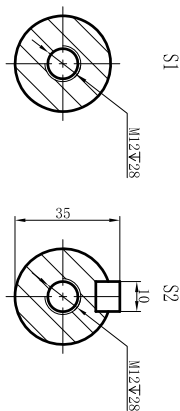

Input

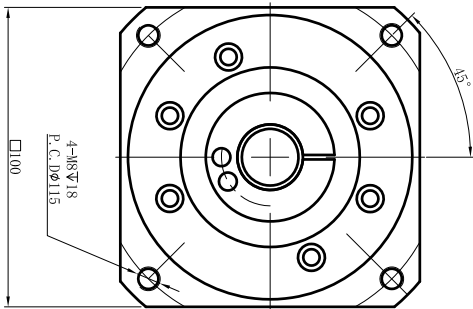

Transmission ratio	(<u>A</u>):1	Mass moments of inertia	(<u>B</u>)Kg.cm ²												
Rated output torque	(<u>C</u>)Nm	Max.Output torque	(<u>D</u>)Nm		40	0.47	255	459	Sign/Date						
Rated Input speed	3000rpm	Max Input speed	6000rpm		35	0.47	300	540			100	0.44	220	396	
Max.radial force	6700N	Max.axial force	3350N		30	0.47	310	558		80	0.44	255	459		
Efficiency	≥ 94%	Operating temperature	-20°~+90°		25	0.47	320	576		70	0.44	300	540		
Mounting position	Any	Lubrication method	Synthetic grease		20	0.47	280	504		60	0.44	310	558		
Weight ±3%	9.5Kg	Service life	20000h		15	0.47	200	360		50	0.44	320	576		
Standard backlash	≤ 7 arcmin	Protection class	IP65	NOTE	Ratio	A	B	C	D	Precision Planetary Reducer				TCB120-L2	
Motor power		Noise level	63dB												
Motor dimensions															
												</			