



Customer Name:

Output



| | | | | | | | | | | | | | | | |
|---------------------|--------------------|-------------------------|------------------------------------|---------------------------|------|-----|------|---------------------------|--|--|--|-----------------------------|------|-----|-----|
| Transmission Ratio | (<u> A </u>):1 | Mass Moments Of Inertia | (<u> B </u>)Kg.cm ² | | | | | | | | | | | | |
| Rated Output Torque | (<u> C </u>)Nm | Max Output Torque | (<u> D </u>)Nm | | | | | | | | | | | | |
| Rated Input Speed | 3000rpm | Max Input Speed | 4000rpm | | | | | Sign/Date | | | | | | | |
| Max Radial Force | 9400N | Max Axial Force | 4700N | 3 | 9.21 | 340 | 612 | | | | | 7 | 7.14 | 550 | 990 |
| | | | | 4 | 7.54 | 535 | 936 | | | | | 8 | 7.07 | 500 | 900 |
| | | | | 5 | 7.42 | 650 | 1170 | | | | | 10 | 7.03 | 445 | 801 |
| Efficiency | ≥ 97% | Operating Temperature | -20°~+90° | 6 | 7.25 | 600 | 1080 | | | | | | | | |
| | | | | Ratio A B C D | | | | Ratio A B C D | | | | | | | |
| Mounting Position | Any | Lubrication Method | Synthetic grease | Note | | | | | | | | Precision Planetary Reducer | | | |
| Weight ±3% | 19Kg | Service Life | 20000h | | | | | | | | | TCE155 | | | |
| | | | | | | | | | | | | | | | |
| Standard Backlash | ≤ 5 arcmin | Protection Class | IP65 | | | | | | | | | TCE155-L1 | | | |
| Motor Power | -- kW | Noise Level | 65dB | | | | | | | | | | | | |
| Motor Dimensions | | | | | | | | | | | | | | | |

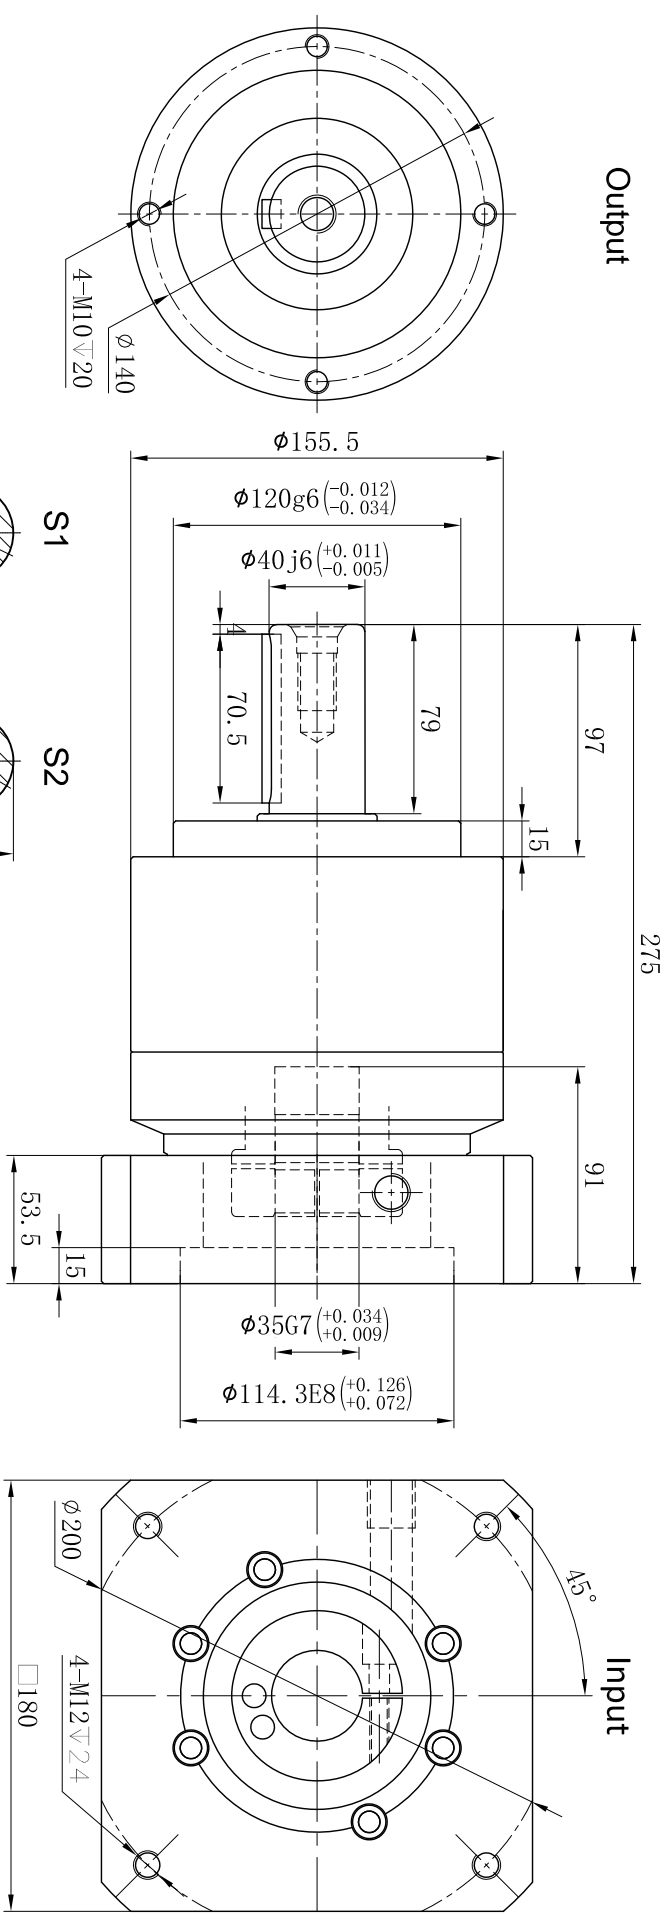


DRAW

CHEC

APPR

RULE



| | |
|------------|-----------|
| Shaft Type | Precision |
|------------|-----------|

Above specifications are for standard reducer and may be subject to change without notice.