

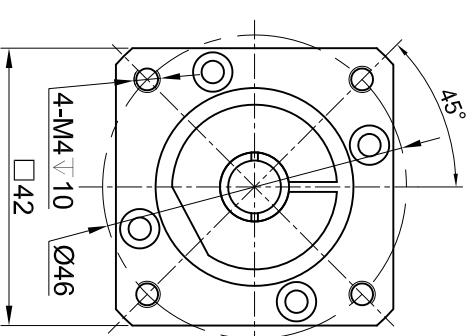


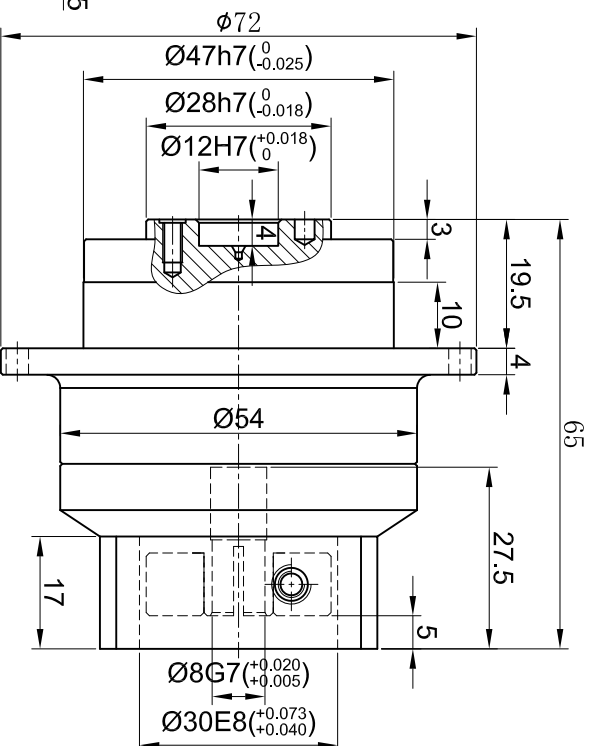

Customer Name:

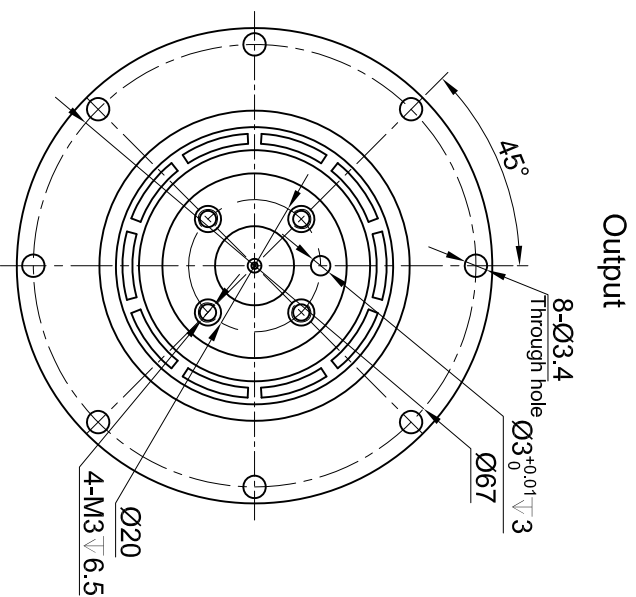

Transmission Ratio	( <u>  A  </u> ):1	Mass Moments Of Inertia	( <u>  B  </u> )Kg.cm <sup>2</sup>														
Rated Output Torque	( <u>  C  </u> )Nm	Max Output Torque	( <u>  D  </u> )Nm														
Rated Input Speed	5000rpm	Max Input Speed	10000rpm		10	0.03	14	25.2	Sign/Date								
					7	0.03	19	34.2									
					5	0.03	20	36									
					4	0.03	19	34.2									
Max Bending Moment	780Nm	Max Axial Force	390N	Ratio	A	B	C	D			Ratio	A	B	C	D		
Efficiency	≥ 97%	Operating Temperature	-20°~+90°	Note								Precision Planetary Reducer				TD047	
Mounting Position	Any	Lubrication Method	Synthetic grease														
Weight ±3%	0.65Kg	Service Life	20000h														
Standard Backlash	--arcmin	Protection Class	IP65	Mark	No.	Sign	Date					TD047-L1					
Motor Power	-- kW	Noise Level	55dB														
Motor Dimensions																Shaft Type	Precision

Above specifications are for standard reducer and may be subject to change without notice.