



Customer Name:

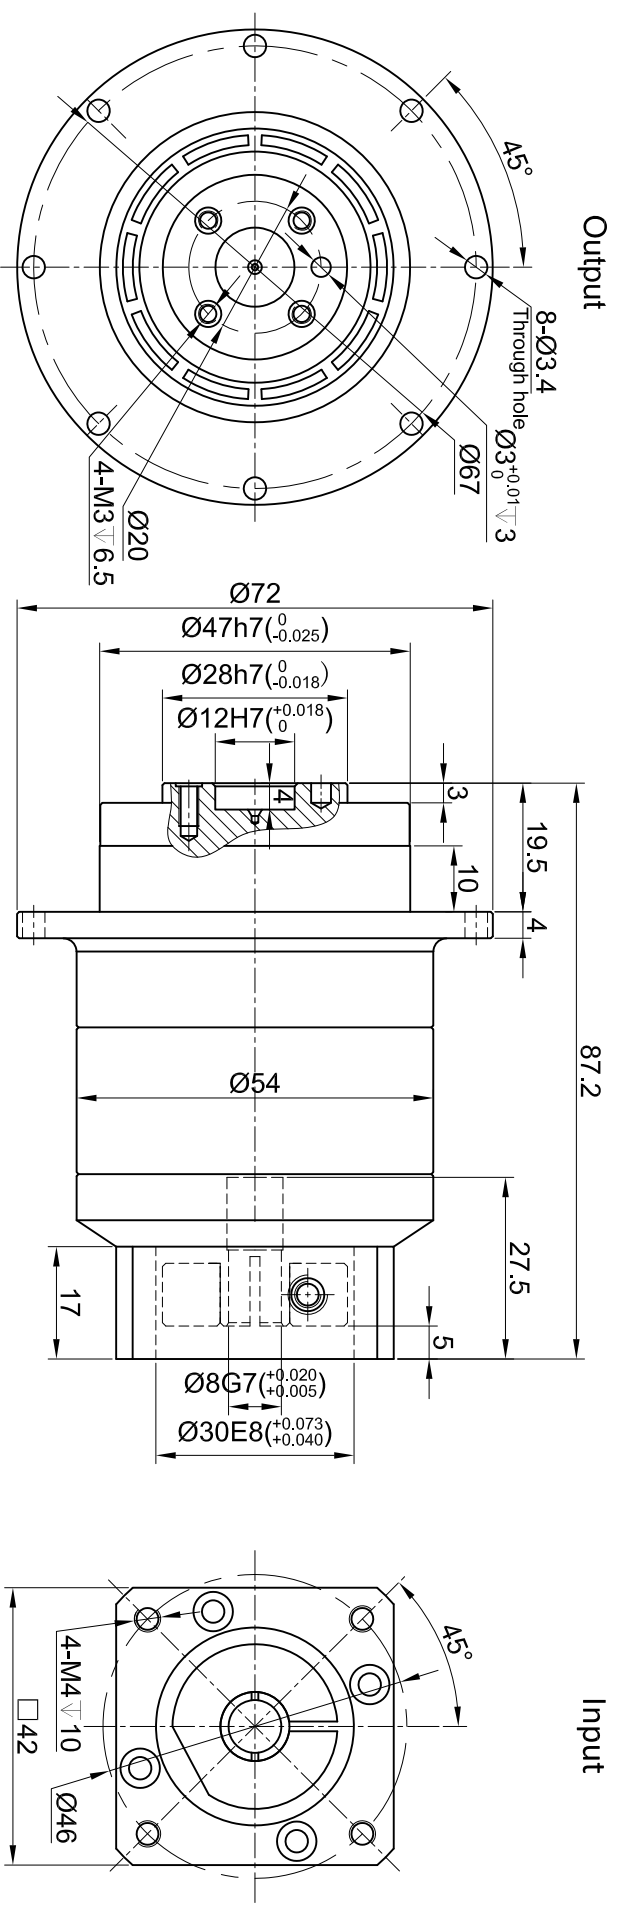

Transmission Ratio	(<u> A </u>):1	Mass Moments Of Inertia	(<u> B </u>)Kg.cm ²															
Rated Output Torque	(<u> C </u>)Nm	Max Output Torque	(<u> D </u>)Nm															
Rated Input Speed	5000rpm	Max Input Speed	10000rpm	40	0.03	17	30.6	Sign/Date										
Max Benging Moment	780Nm	Max Axial Force	390N	35	0.03	19	34.2											
				25	0.03	20	36											
				20	0.03	19	34.2											
Efficiency	≥ 94%	Operating Temperature	-20°~+90°	Ratio	A	B	C	D		Ratio	A	B	C	D				
Mounting Position	Any	Lubrication Method	Synthetic grease	Note												Precision Planetary Reducer	TD047	
Weight ±3%	0.98Kg	Service Life	20000h															
Standard Backlash	--arcmin	Protection Class	IP65		Mark	No.	Sign	Date								TD047-L2	Shaft Type	Precision
Motor Power	-- KW	Noise Level	55dB		DRAW													
					CHEC													
					APPR													
Motor Dimensions					RULE													