

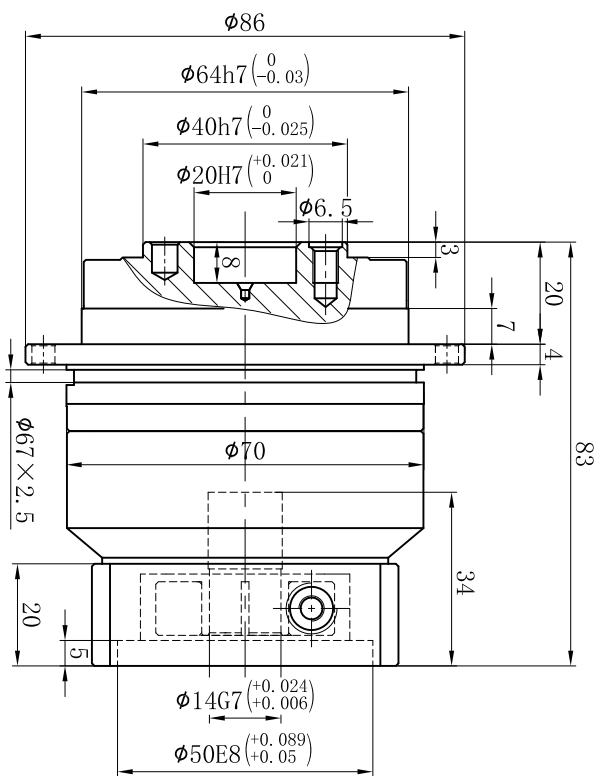


Customer Name:

Output

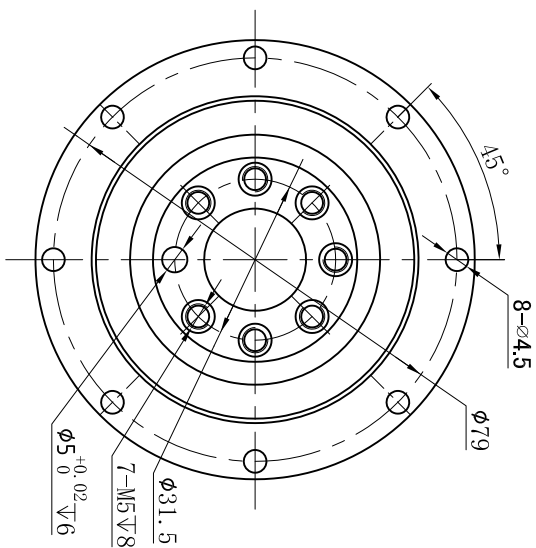

Input

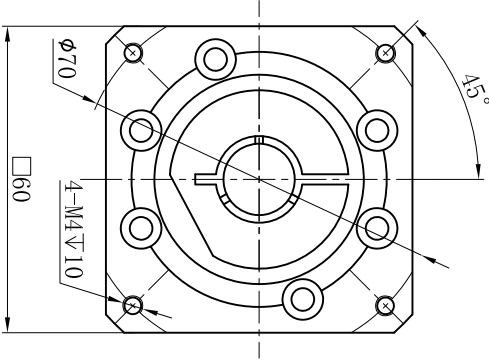

Transmission Ratio	(A):1	Mass Moments Of Inertia	(B)Kg.cm ²										
Rated Output Torque	(C)Nm	Max Output Torque	(D)Nm	10	0.13	42	75.6	Sign/Date					
Rated Input Speed	5000rpm	Max Input Speed	10000rpm	7	0.13	50	90						
Max Bending Moment	125N	Max Axial Force	1050N	5	0.13	58	104.4						
Efficiency	≥ 97%	Operating Temperature	-20°~+90°	4	0.14	50	90						
Mounting Position	Any	Lubrication Method	Synthetic grease	Ratio	A	B	C	D					
Weight ±3%	1.3Kg	Service Life	30000h	Note									
Standard Backlash	≤ 5 arcmin	Protection Class	IP65										
Motor Power	-- kW	Noise Level	58dB										
Motor Dimensions													

Mark	No.	Sign	Date	Precision Planetary Reducer	TD064
DRAW					
CHEC					
APPR					
RULE					

Ratio	A	B	C	D

Shaft Type	Precision

Above specifications are for standard reducer and may be subject to change without notice.