




Customer Name:

Output

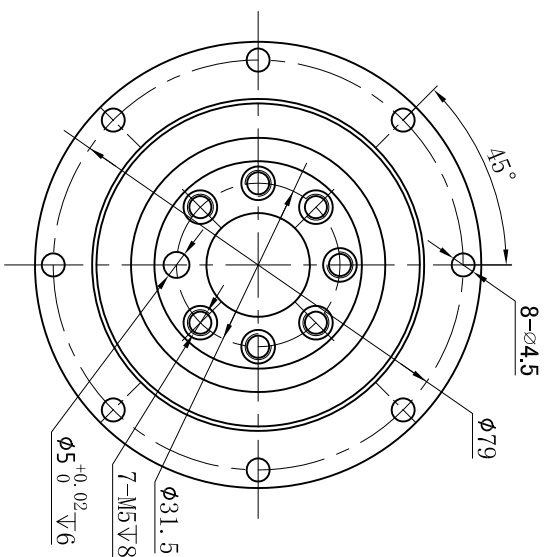

Input

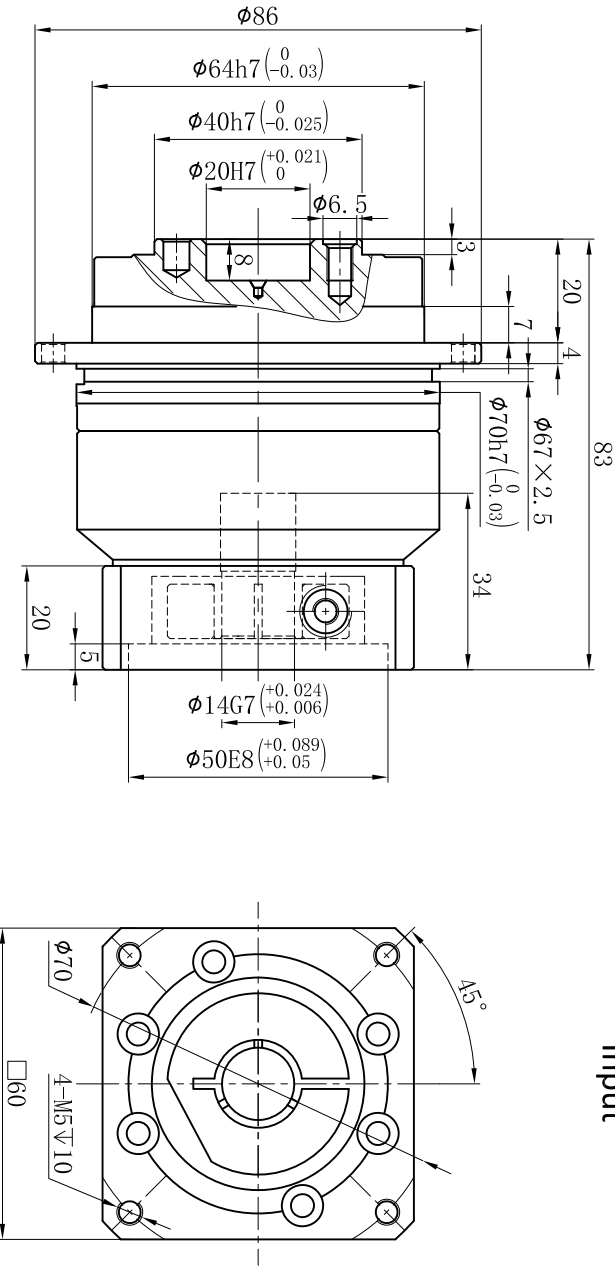

Transmission Ratio	(<u> A </u>):1	Mass Moments Of Inertia	(<u> B </u>)Kg.cm ²																	
Rated Output Torque	(<u> C </u>)Nm	Max Output Torque	(<u> D </u>)Nm					Sign/Date												
Rated Input Speed	5000rpm	Max Input Speed	10000rpm	4	0.14	50	90													
				5	0.13	58	104.4													
				7	0.13	50	90													
Max Bending Moment	125N	Max Axial Force	1050N	10	0.13	42	75.6													
Efficiency	≥ 97%	Operating Temperature	-20°~+90°	Ratio	A	B	C	D					Ratio	A	B	C	D			
Mounting Position	Any	Lubrication Method	Synthetic grease	Note								Precision Planetary Reducer				TD064				
Weight ±3%	1.3Kg	Service Life	30000h																	
Standard Backlash	≤ 5 arcmin	Protection Class	IP65	Mark	No.	Sign	Date									TD064-L1				
Motor Power	-- KW	Noise Level	58dB					DRAW	CHEC	APPR	RULE					Shaft Type Precision				
Motor Dimensions												