


Customer Name:



Transmission Ratio	(<u> A </u>):1	Mass Moments Of Inertia	(<u> B </u>)Kg.cm ²																
Rated Output Torque	(<u> C </u>)Nm	Max Output Torque	(<u> D </u>)Nm		20	0.03	48	86.4	Sign/Date		100	0.03	40	72					
Rated Input Speed	5000rpm	Max Input Speed	10000rpm		25	0.03	60	108											
					35	0.03	50	90											
					40	0.03	48	81											
					50	0.03	60	108											
	70	0.03	50	90															
Max Bending Moment	125N	Max Axial Force	1050N																
Efficiency	≥ 94%	Operating Temperature	-20°~+90°	Ratio	A	B	C	D		Ratio	A	B	C	D					
Mounting Position	Any	Lubrication Method	Synthetic grease	Note						Precision Planetary Reducer	TD064								
Weight ±3%	1.6Kg	Service Life	300000h																
Standard Backlash	≤ 7 arcmin	Protection Class	IP65	ø14 to ø11	Mark	No.	Sign	Date			TD064-L2								
Motor Power	-- KW	Noise Level	58dB															Shaft Type	Precision
Motor Dimensions																			

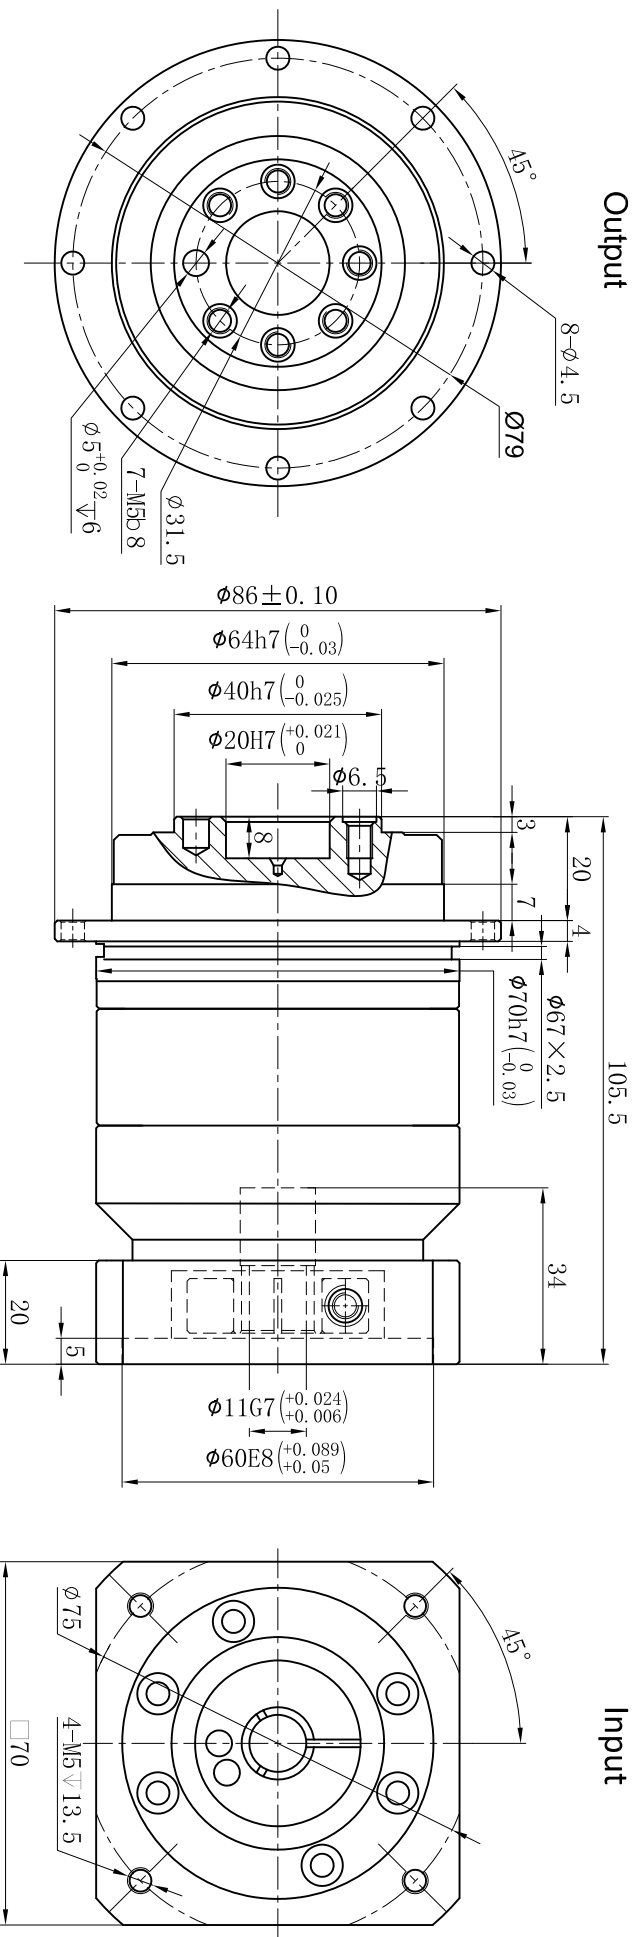