


Customer Name:

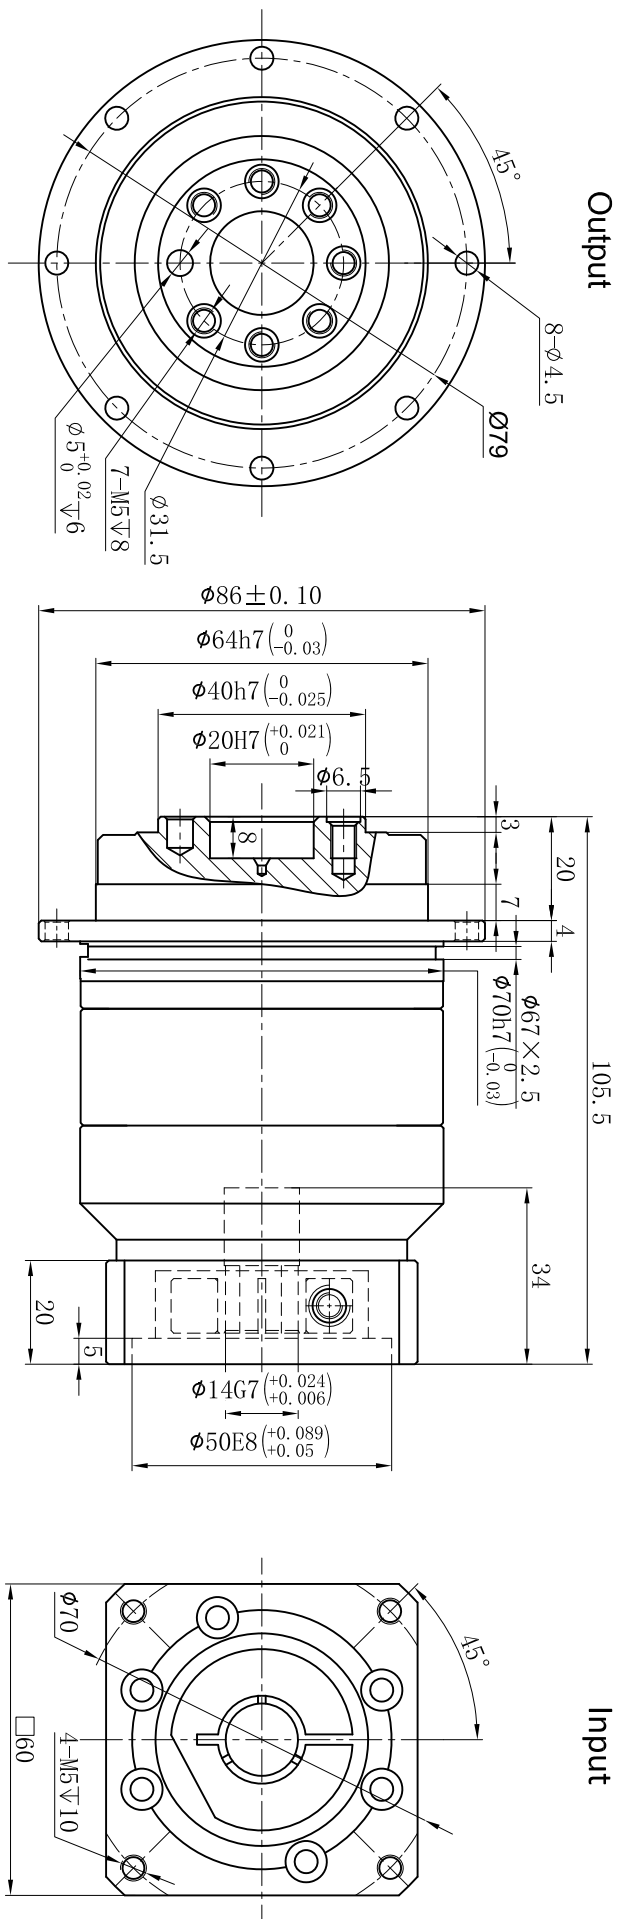

Transmission Ratio	( <u>  A  </u> ):1	Mass Moments Of Inertia	( <u>  B  </u> )Kg.cm <sup>2</sup>												
Rated Output Torque	( <u>  C  </u> )Nm	Max Output Torque	( <u>  D  </u> )Nm		20	0.03	50	90	Sign/Date			100	0.03	42	75.6
Rated Input Speed	5000rpm	Max Input Speed	10000rpm		25	0.03	58	104.4							
Max Bending Moment	125N	Max Axial Force	1050N		35	0.03	50	90							
Efficiency	≥ 94%	Operating Temperature	-20°~+90°		40	0.03	48	81							
Mounting Position	Any	Lubrication Method	Synthetic grease		50	0.03	58	104.4							
Weight ±3%	1.8Kg	Service Life	300000h		70	0.03	50	90							
Standard Backlash	≤ 7 arcmin	Protection Class	IP65	Note	Ratio	A	B	C	D		Ratio	A	B	C	D
Motor Power	-- KW	Noise Level	58dB												
Motor Dimensions															
						</									