


Customer name:

Output

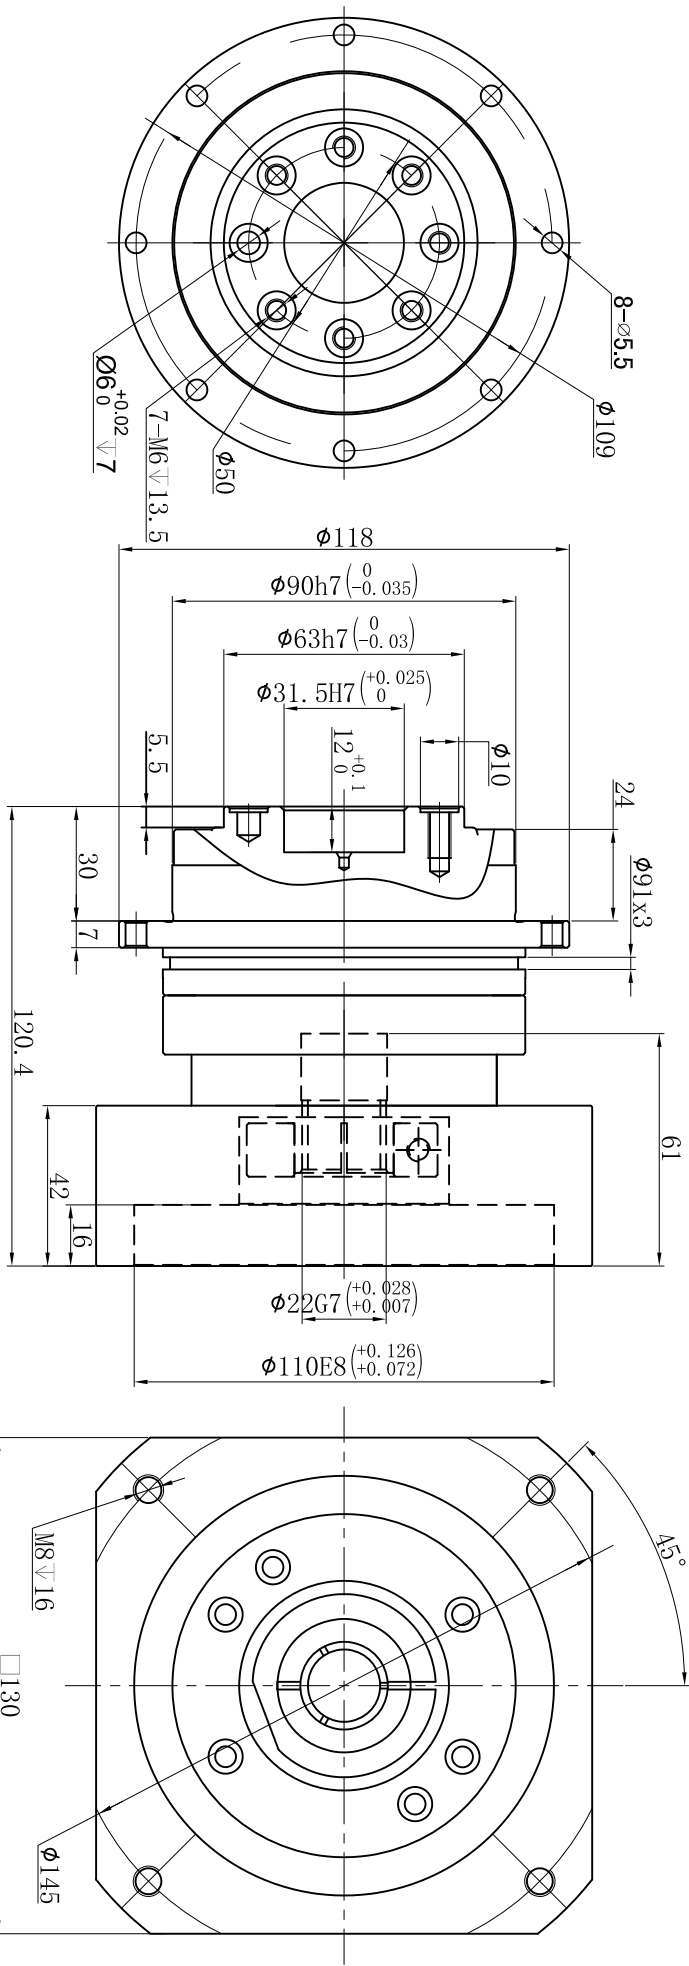

Transmission ratio	( <u>  A  </u> ):1	Mass moments of inertia	( <u>  B  </u> )Kg.cm <sup>2</sup>												
Rated output torque	( <u>  C  </u> )Nm	Max.output torque	( <u>  D  </u> )Nm					Sign/Date							
Rated input speed	4000rpm	Max input speed	8000rpm	10	0.44	102	183								
				7	0.45	140	252								
				5	0.47	160	280								
Max.radial force	--	Max.axial force	2850N	4	0.48	130	234								
Efficiency	≥ 97%	Operating temperature	-20°~+90°	Ratio	A	B	C	D	Ratio		A	B	C	D	
Mounting position	Any	Lubrication method	Synthetic grease	Note				Precision planetary reducer				TD090			
Weight ±3%	3.9Kg	Service life	20000h												
Standard backlash	≤ 5 arcmin	Protection class	IP65												
Motor power		Noise level	60dB												
Motor dimensions															
