

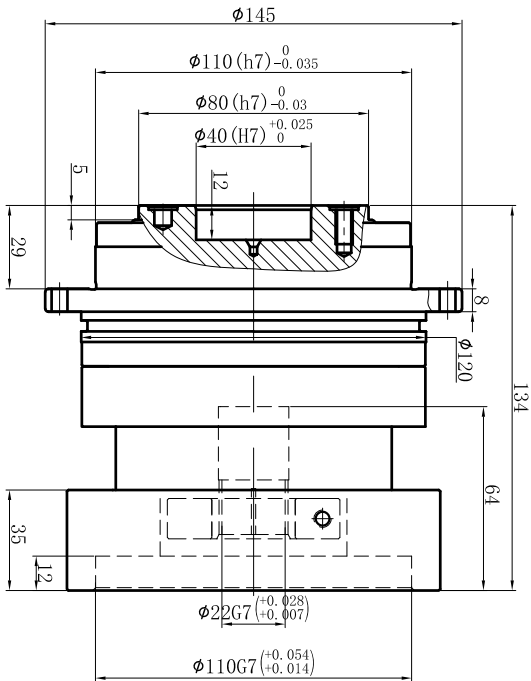


Customer name:

Output

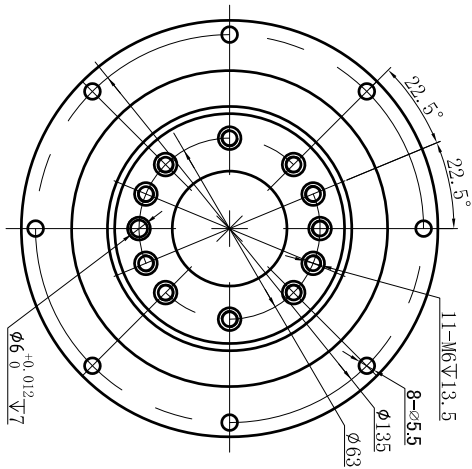

Input

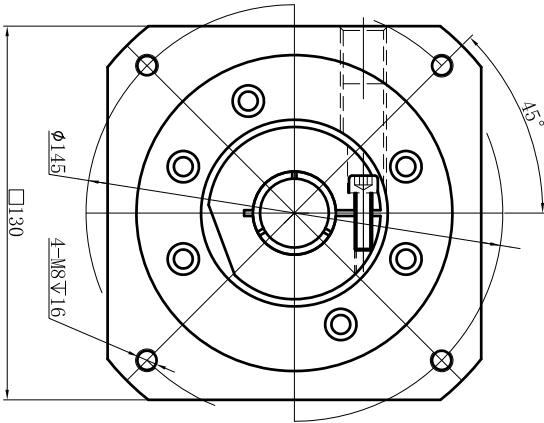

Transmission ratio	(A):1	Mass moments of inertia	(B)Kg.cm ²										
Rated output torque	(C)Nm	Max.Output torque	(D)Nm	10	2.57	230	414	Sign/Date					
Rated input speed	4000rpm	Max input speed	8000rpm	7	2.62	300	540						
Max.radial force	-	Max.axial force	2990N	5	2.71	330	594						
Efficiency	≥ 97%	Operating temperature	-20°~+90°	4	2.87	270	486						
Mounting position	Any	Lubrication method	Synthetic grease	Ratio	A	B	C	D					
Weight ±3%	5.6Kg	Service life	20000h	NOTE									
Standard backlash	≤ 5 arcmin	Protection class	IP65										
Motor power		Noise level	60dB										
Motor dimensions													

				Mark	No.	Sign	Date	Precision Planetary Reducer				TD110	
												TD110-L1	
												Shaft Type	Precision