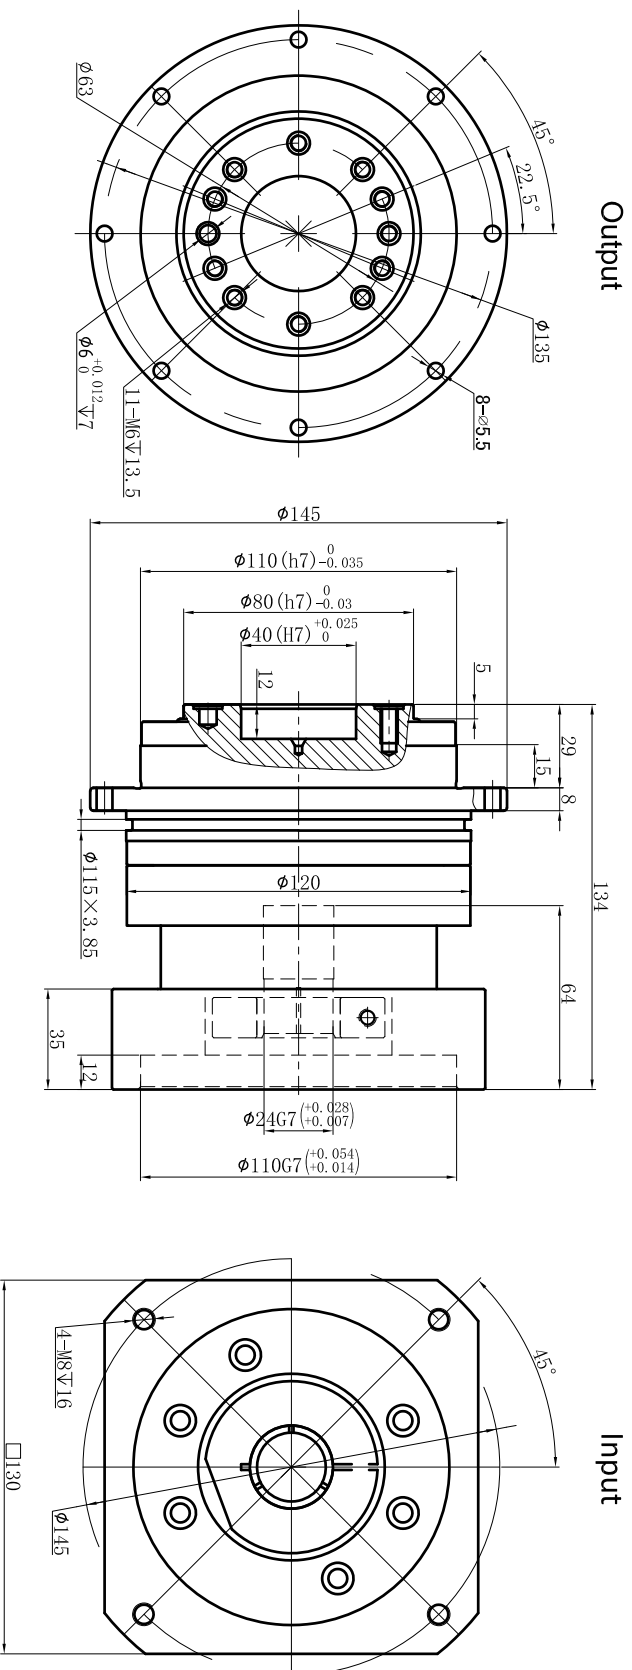





Customer name:



Transmission ratio	(<u> A </u>):1	Mass moments of inertia	(<u> B </u>)Kg.cm ²											
Rated output torque	(<u> C </u>)Nm	Max.Output torque	(<u> D </u>)Nm											
Rated input speed	4000rpm	Max input speed	8000rpm	10	2.57	235	423	Sign/Date						
Max.bending moment	430N	Max.axial force	2990N	7	2.62	300	540							
				5	2.71	333	599.4							
				4	2.87	290	522							
Efficiency	≥ 97%	Operating temperature	-20°~+90°	Ratio	A	B	C	D		Ratio	A	B	C	D
Mounting position	Any	Lubrication method	Synthetic grease	NOTE										
Weight ±3%	5.9Kg	Service life	30000h											
Standard backlash	≤ 5 arcmin	Protection class	IP65											
Motor power		Noise level	63dB											
Motor dimensions														

			TD110-L1	Shaft Type	Precision