

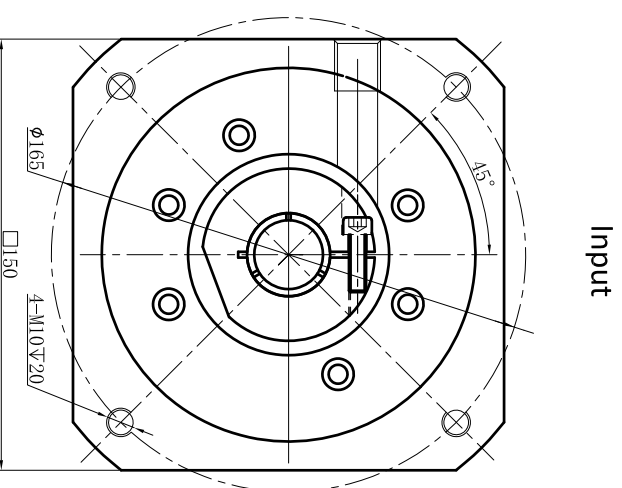


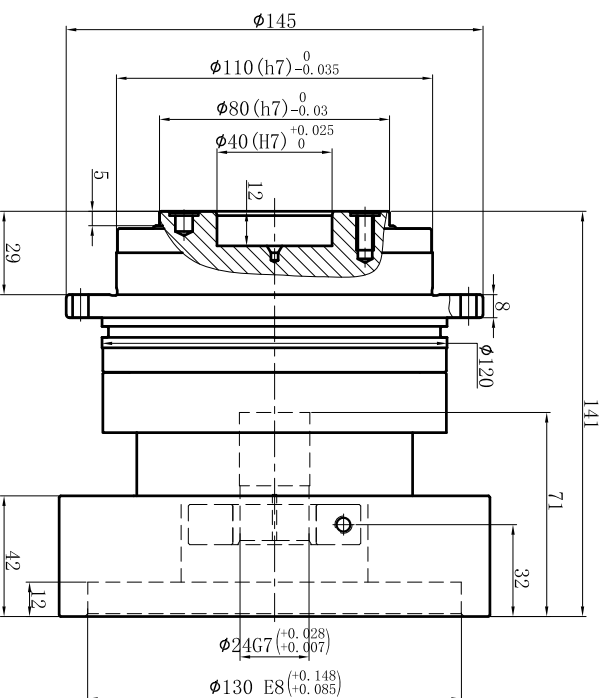


Customer name:

## Output

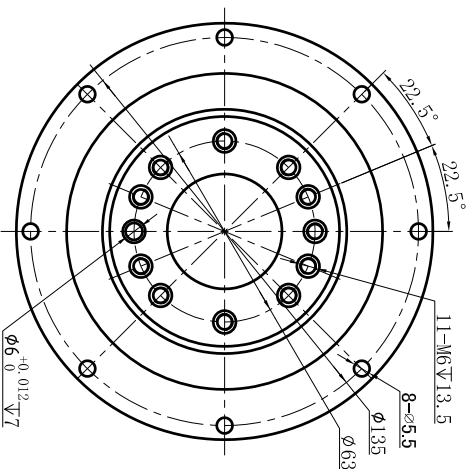

Transmission ratio	( <u>  A  </u> ):1	Mass moments of inertia	( <u>  B  </u> )Kg.cm <sup>2</sup>													
Rated output torque	( <u>  C  </u> )Nm	Max.Output torque	( <u>  D  </u> )Nm													
Rated input speed	4000rpm	Max input speed	8000rpm	10		2.57	230	414	Sign/Date							
Max.radial force	-	Max.axial force	2990N	7	2.62	300	540									
				5	2.71	330	594									
				4	2.87	270	486									
Efficiency	≥ 97%	Operating temperature	-20°~+90°	Ratio	A	B	C	D			Ratio	A	B	C	D	
Mounting position	Any	Lubrication method	Synthetic grease	NOTE								Precision Planetary Reducer				TD110
Weight ±3%	5.6Kg	Service life	20000h													
Standard backlash	≤ 5 arcmin	Protection class	IP65													
Motor power		Noise level	60dB													TD110-L1
Motor dimensions																

	DRAW		Date	Precision Planetary Reducer	TD110-L1
	CHEC				
	APPR				
	RULE				
Shaft Type		Precision			

(Above specifications are for standard reducer and may be subject to change without notice.)