




Customer Name:

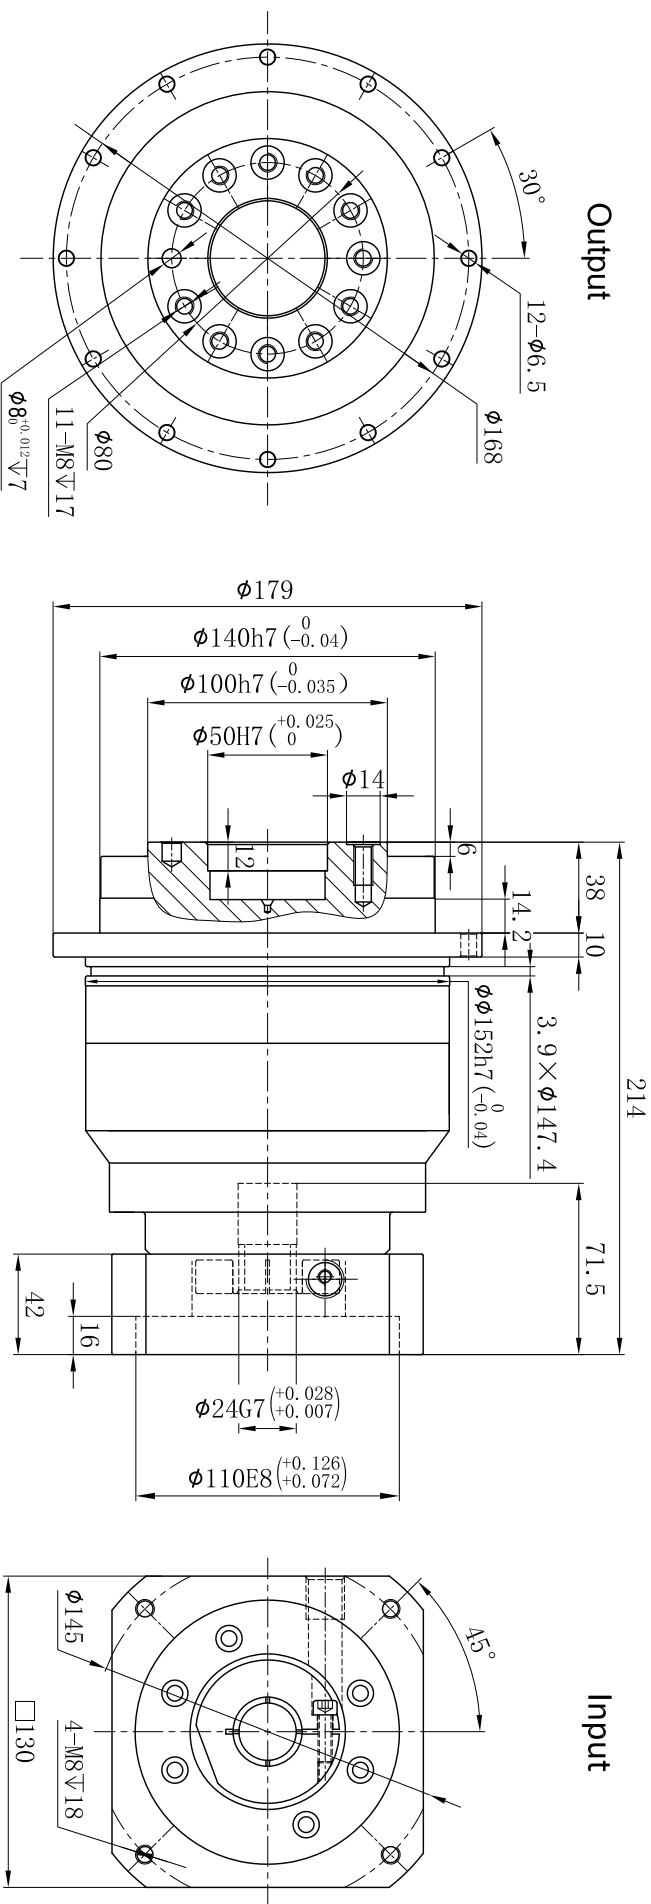

Transmission Ratio	( <u>  A  </u> ):1	Mass Moments Of Inertia	( <u>  B  </u> )Kg.cm <sup>2</sup>																	
Rated Output Torque	( <u>  C  </u> )Nm	Max Output Torque	( <u>  D  </u> )Nm	20	2.71	545	981	Sign/Date	100	2.57	460	828								
Rated Input Speed	3000rpm	Max Input Speed	6000rpm	25	2.71	650	1170													
				35	2.71	555	999													
				40	2.71	560	1008													
				50	2.57	650	1170													
Max Radial Force	1300N	Max Axial Force	10590N																	
Efficiency	≥ 94%	Operating Temperature	-20°~+90°	Ratio	A	B	C	D	Ratio				A	B	C	D				
Mounting Position	Any	Lubrication Method	Synthetic grease	Note					Precision Planetary Reducer				TD140							
Weight ±3%	15.5Kg	Service Life	300000h																	
Standard Backlash	≤ 7arcmin	Protection Class	IP65		Mark	No.	Sign	Date												
Motor Power	-- KW	Noise Level	65dB									TD140-L2		Shaft Type	Precision					
Motor Dimensions																				