




Customer name:

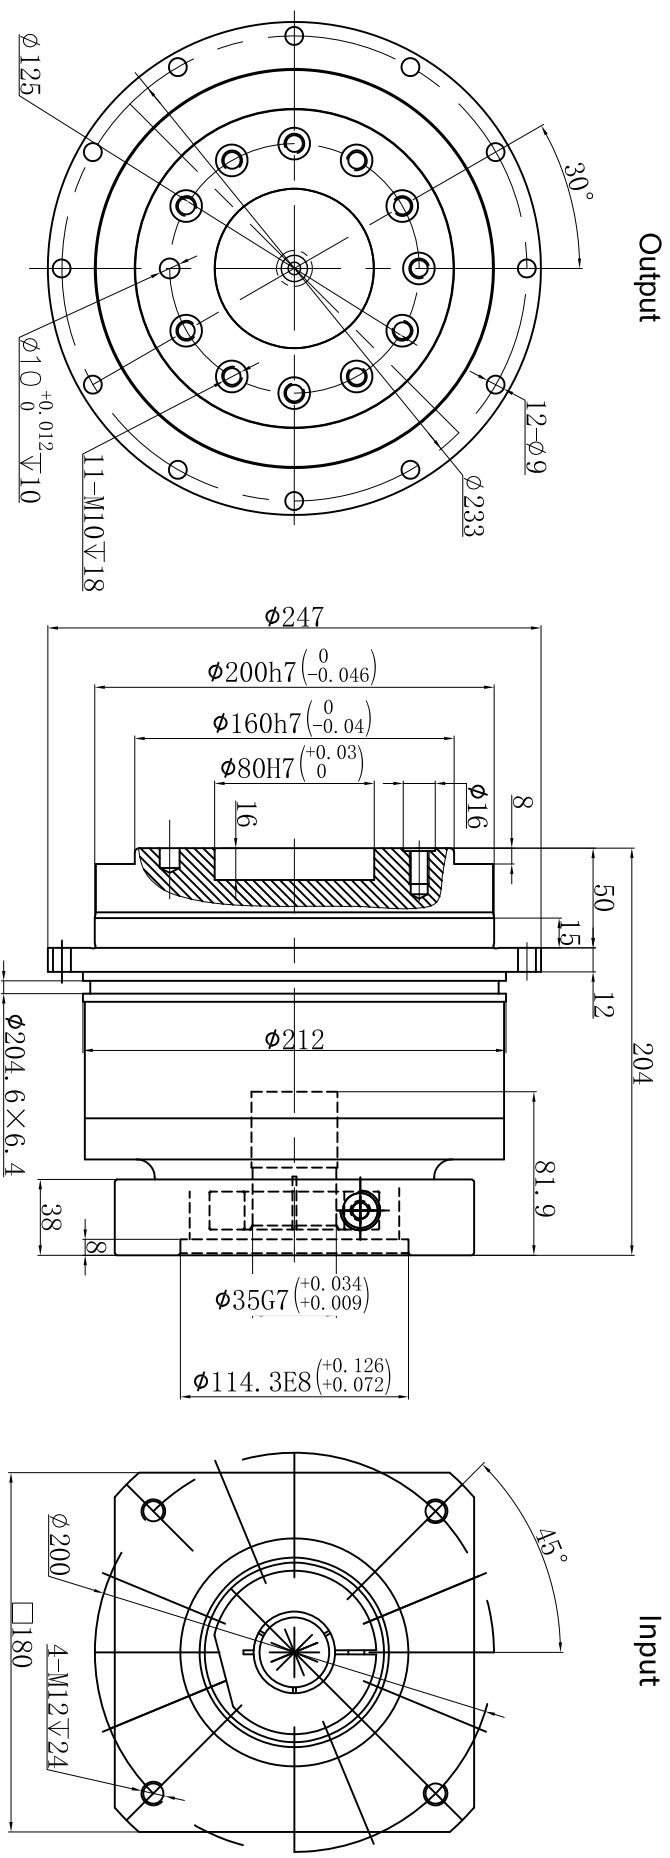

Transmission ratio	( <u>  A  </u> ):1	Mass moments of inertia	( <u>  B  </u> )Kg.cm <sup>2</sup>													
Rated output torque	( <u>  C  </u> )Nm	Max.output torque	( <u>  D  </u> )Nm													
Rated input speed	3000rpm	Max input speed	6000rpm			10	22.51	910	1638	Sign/Date						
Max.bending moment	3064N	Max.axial force	16660N			7	22.48	1100	1980							
						5	23.29	1200	2160							
						4	25.03	1050	1836							
Efficiency	≥ 97%	Operating temperature	-20°~+90°	Ratio	A	B	C	D			Ratio	A	B	C	D	
Mounting position	Any	Lubrication method	Synthetic grease	Note							Precision planetary reducer		TD200			
Weight ±3%	35.1Kg	Service life	30000h													
Standard backlash	≤ 5 arcmin	Protection class	IP65	Mark	No.	Sign	Date					TD200-L1				
Motor power	Noise level	66dB												Shaft Type	Precision	
Motor dimensions								RULE								