



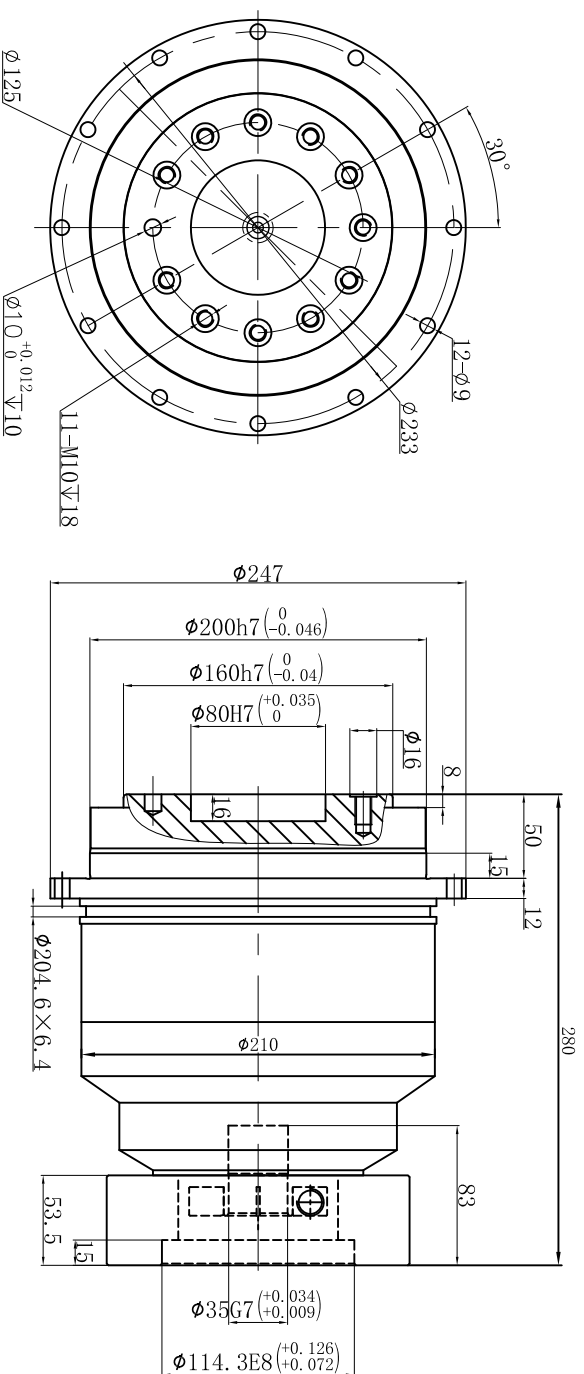

Customer name:

Output

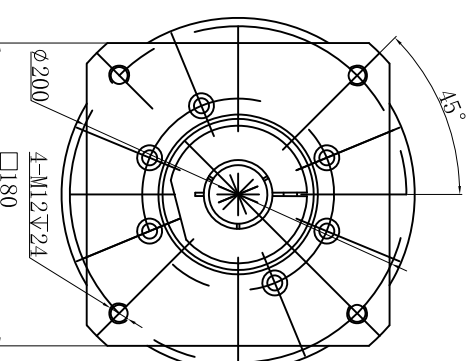

Input



Transmission ratio	(<u> A </u>):1	Mass moments of inertia	(<u> B </u>)Kg.cm ²														
Rated output torque	(<u> C </u>)Nm	Max.output torque	(<u> D </u>)Nm														
Rated input speed	3000rpm	Max input speed	6000rpm		40	7.03	1100	1980	Sign/Date								
Max.bending moment	3064N	Max.axial force	16660N		35	7.42	1100	1980				100	7.03	910	1638		
					25	7.42	1200	2160				70	7.03	1100	1980		
					20	7.42	1050	1836				50	7.03	1200	2160		
Efficiency	≥ 94%	Operating temperature	-20~+90°	Ratio	A	B	C	D			Ratio	A	B	C	D		
Mounting position	Any	Lubrication method	Synthetic grease	Note							Precision planetary reducer		TD200				
Weight ±3%	34.9Kg	Service life	30000h														
				Mark	No.	Sign	Date										
Standard backlash	≤ 7 arcmin	Protection class	IP65										TD200-L2				
Motor power		Noise level	66dB														
Motor dimensions																	
																	
												Shaft Type		Precision			

Above specifications are for standard reducer and may be subject to change without notice.