



Customer name:

Output

Input

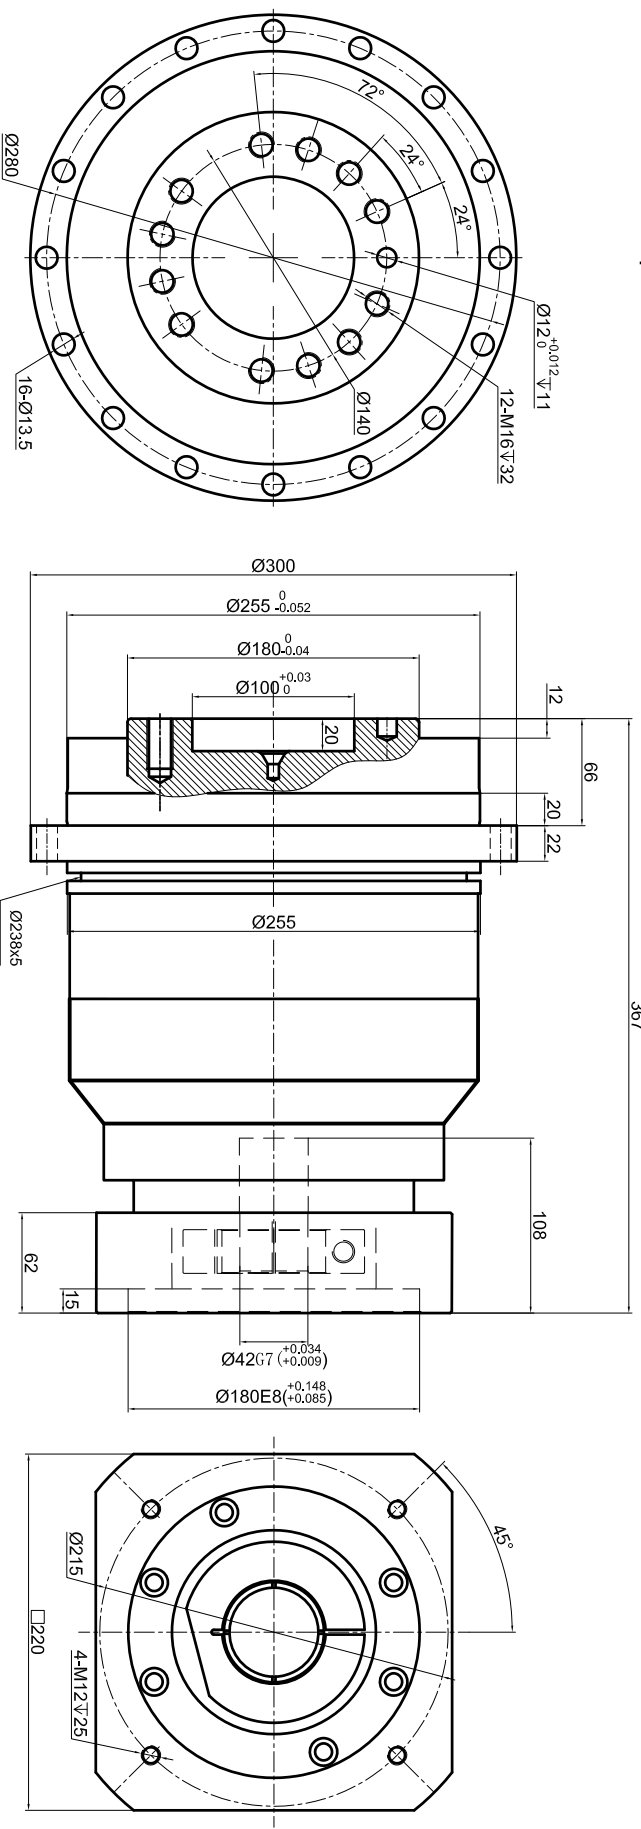

Transmission ratio	(<u> A </u>):1	Mass moments of inertia	(<u> B </u>)Kg.cm ²													
Rated output torque	(<u> C </u>)Nm	Max.Output torque	(<u> D </u>)Nm													
Rated input speed	2000rpm	Max input speed	4000rpm			40	22.51	1700	3060	Sign/Date			100	22.51	1500	2700
Max.radial force	-	Max.axial force	29430N			35	23.29	1810	3258				70	22.51	1810	3258
						25	23.29	2008	3614				50	22.51	2008	3614
						20	23.29	1700	3060							
Efficiency	≥ 97%	Operating temperature	-20°~+90°	Ratio	A	B	C	D			Ratio	A	B	C	D	
Mounting position	Any	Lubrication method	Synthetic grease	NOTE						Precision Planetary Reducer		TD255				
Weight ±3%	70.4Kg	Service life	20000h													
Standard backlash	≤ 5 arcmin	Protection class	IP65	Mark	No.	Sign	Date			TD255-L2						
Motor power		Noise level	70dB													
Motor dimensions				DRAW												
				CHEC												
				APPR						Shaft Type		Precision				
				RULE												