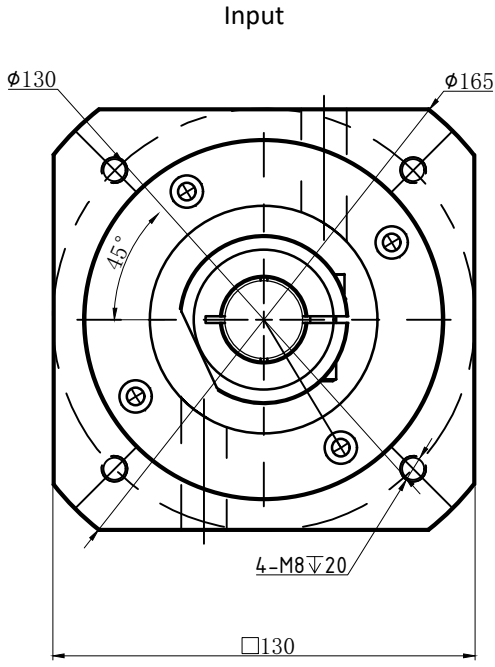
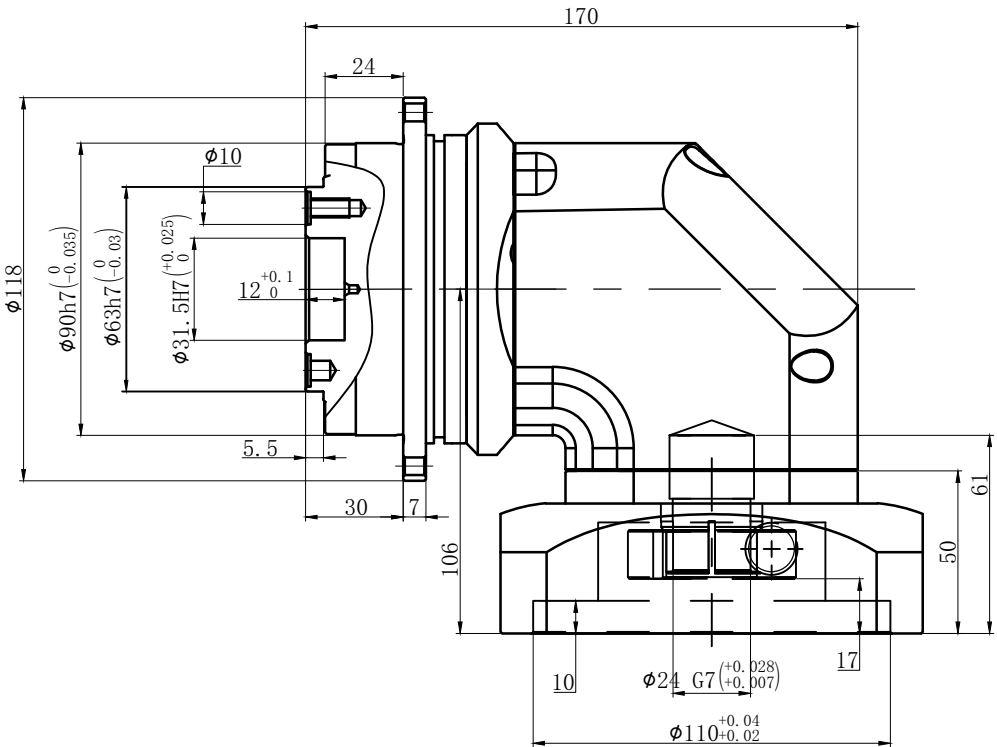
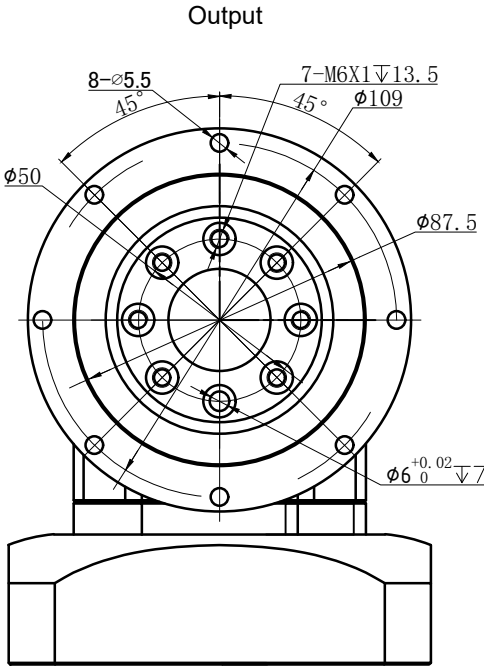




Customer name:



Transmission ratio	(A):1	Mass moments of inertia	(B)Kg.cm ²
Rated output torque	(C)Nm	Max.output torque	(D)Nm
Rated input speed	4000rpm	Max input speed	8000rpm
Max Benging Moment	235Nm	Max.axial force	2850N
Efficiency	≥ 95%	Operating temperature	-10°~+90°
Mounting position	Any	Lubrication method	Synthetic grease
Weight ±3%	5.9Kg	Service life	20000h
Standard backlash	≤ 6 arcmin	Protection class	IP65
Motor power		Noise level	65dB
Motor dimensions			

					Sign/Date					
	10	2.25	100	180						
	7	2.25	140	252						
	5	2.25	150	270			20	1.87	100	180
	4	2.25	120	252			14	1.87	140	252
Ratio	A	B	C	D		Ratio	A	B	C	D
Note						Precision planetary reducer		TDR090		
		Mark	No.	Sign	Date			TDR090-L1		
			DRAW							
			CHEC							
			APPR							
			RULE							
								Shaft Type	Precision	

Above specifications are for standard reducer and may be subject to change without notice.