



Customer name:

Output

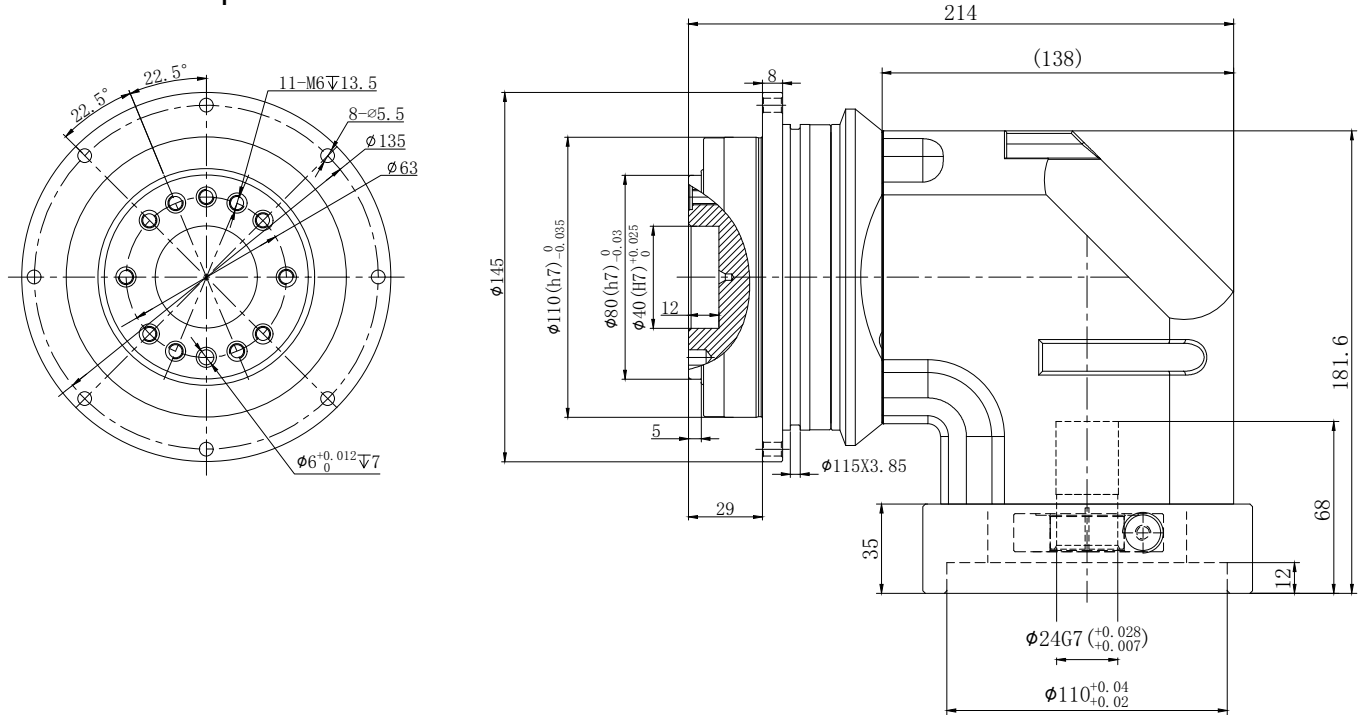

Input

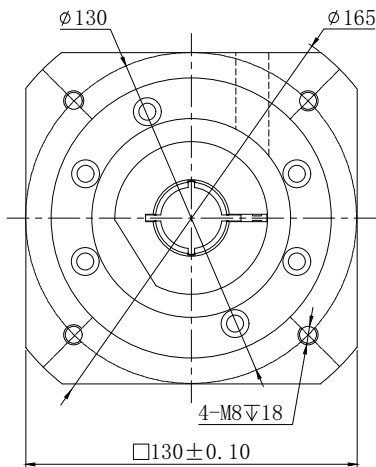

Transmission ratio	(A):1	Mass moments of inertia	(B)Kg.cm ²
Rated output torque	(C)Nm	Max.Output torque	(D)Nm
Rated input speed	4000rpm	Max input speed	8000rpm
Max.bending moment	430N	max.axial force	2990N
Efficiency	≥ 95%	Operating temperature	-20°~+90°
Mounting position	Any	Lubrication method	Synthetic grease
Weight ±3%	--Kg	Service life	30000h
Standard backlash	≤ 6 arcmin	Protection class	IP65
Motor power		Noise level	68dB
Motor dimensions			

	10	6.25	230	414	Sign/Date		20	6.25	230	414
	7	6.84	300	540						
	5	6.84	330	594			14	6.25	300	594
	4	6.84	270	486						
Ratio	A	B	C	D		Ratio	A	B	C	D
NOTE						Precision Planetary Reducer		TDR110		
<div></div>		Mark	No.	Sign	Date	<div></div>		TDR110-L1		
		<div></div>	DRAW							
			CHEC							
			APPR							
			RULE							
		Shaft Type		Precision						