

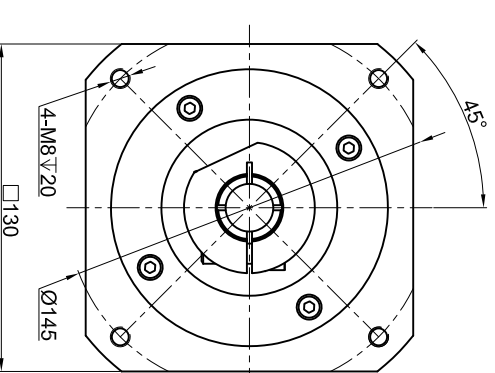


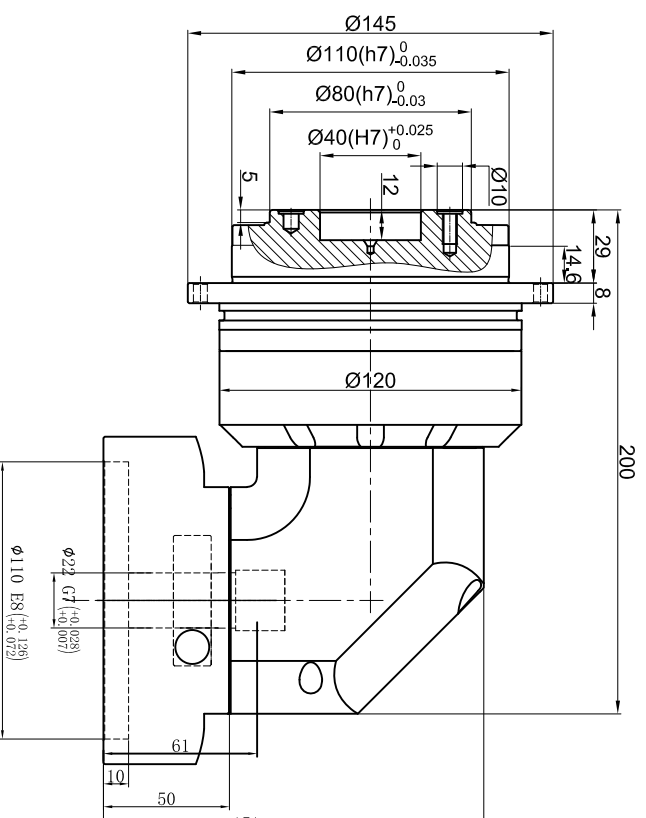

Customer Name:

Output

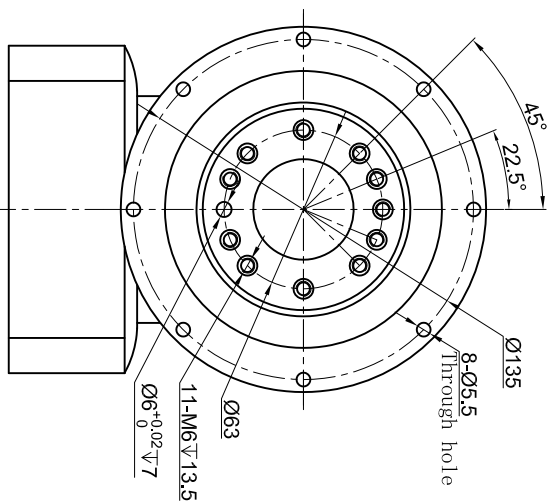

Input

Transmission ratio	(<u> A </u>):1	Mass moments of inertia	(<u> B </u>)Kg.cm ²
Rated output torque	(<u> C </u>)Nm	Max.output torque	(<u> D </u>)Nm
Rated input speed	4000rpm	Max input speed	8000rpm
Max bending moment	430Nm	Max axial force	2990N
Efficiency	≥ 92%	Operating temperature	-20°~+90°
Mounting position	Any	Lubrication method	Synthetic grease
Weight ±3%	11Kg	Service life	30000h
Standard backlash	≤ 9 arcmin	Protection class	IP65
Motor power	-- KW	Noise level	68dB
Motor dimensions			

Note	Ratio	A	B	C	D	Sign/Date	Ratio	A	B	C	D
	50	2.25	330	594							
	40	2.25	260	468							
	35	2.25	300	540							
	25	2.25	330	594							
Precision Planetary Reducer	Mark	NO.	Sign	Date	TDR110~12						
		DRAW									
		CHEC									
		APPR									
		RULE									
											
Shaft Type										Precision	