
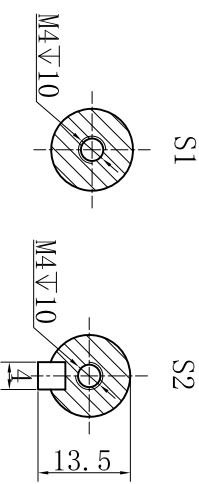



Customer name:

Output

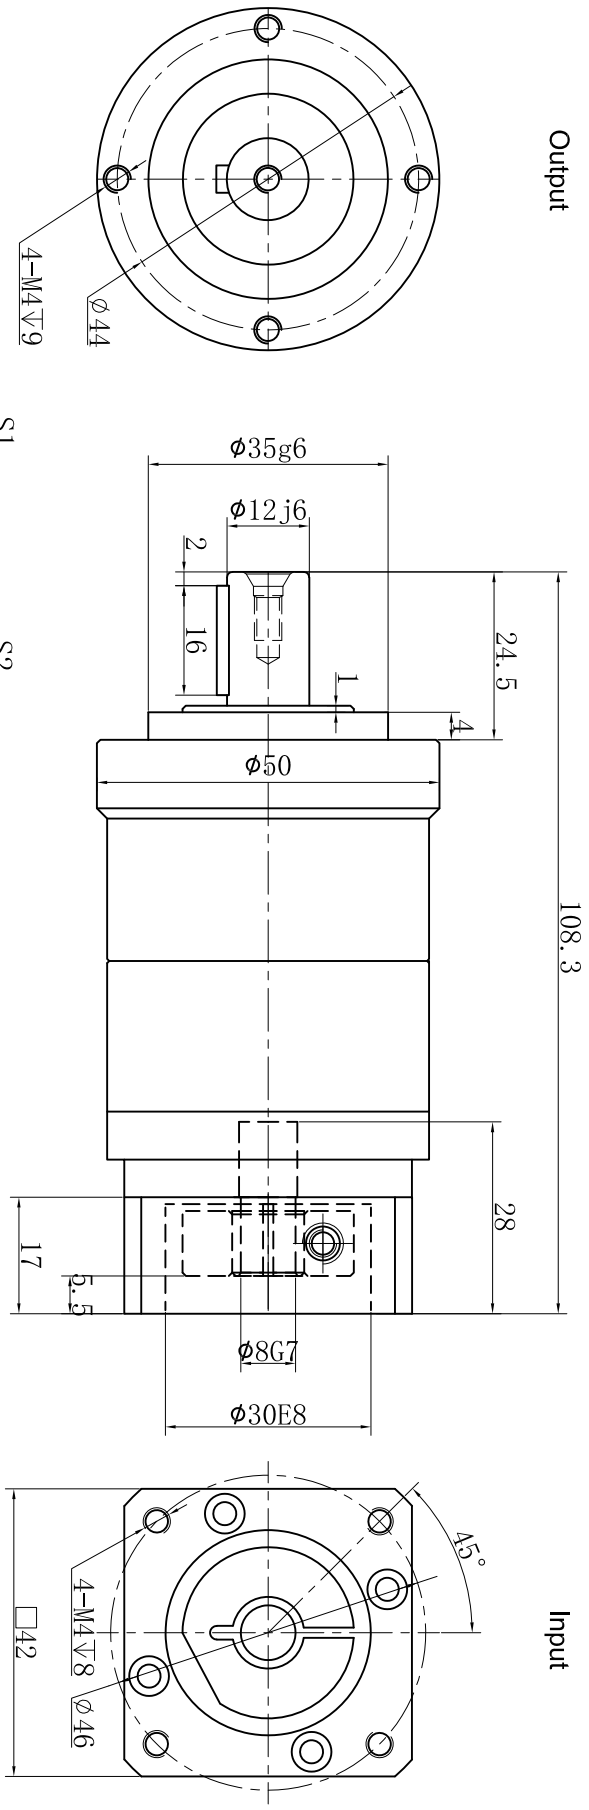

Transmission ratio	(<u> A </u>):1	Mass moments of inertia	(<u> B </u>)Kg.cm ²												
Rated output torque	(<u> C </u>)Nm	Max.Output torque	(<u> D </u>)Nm												
Rated input speed	5000rpm	Max input speed	10000rpm	35	0.03	19	34	Sign/Date		100	0.03	14	25.2		
				30	0.03	20	36			80	0.03	17	30.6		
				25	0.03	22	39.5			70	0.03	19	34		
				20	0.03	19	34			60	0.03	20	36		
Max.radial force	702N	Max.axial force	390N							50	0.03	22	39.5		
Efficiency	≥ 97%	Operating temperature	-20°~+90°	Ratio	A	B	C	D		40	0.03	17	30.6		
Mounting position	Any	Lubrication method	Synthetic grease	NOTE					Precision Planetary Reducer	TE050					
Weight ±3%	0.9Kg	Service life	20000h	Mark	No.		Sign	Date		TE050-L2					
Standard backlash	≤ 7 arcmin	Protection class	IP65												
Motor power		Noise level	56dB												
Motor dimensions															

(Above specifications are for standard reducer and may be subject to change without notice.)